

Job Name/Location:

Tag #:

Date:

For:  File  Resubmit  
 Approval  Other

PO No.:

Architect:

GC:

Engr:

Mech:

Rep:  
(Company)

(Project Manager)

**PRARH1**  
 Auxiliary Heater Relay Kit for Multi V Indoor Units



**Electrical:**

Power Supply	12VDC (from indoor unit)
--------------	--------------------------

**Surrounding Conditions:**

Operating Temperature	14 – 158° F
Storage Temperature	-4 – 176° F
Humidity	0 – 98% non-condensing

**Unit Data:**

Dimensions	7-9/32 W x 3-13/32 H x 2-9/32 D
Contact Rating	3A @ 24VAC

**Connectivity:**

LG Communications	V-Net
Cabling:	30" Wiring Harness (included)


**Standard Features**

- Provides two stages of auxiliary heat for indoor unit
- Provides ability to use the two stage auxiliary heater as the primary or secondary heating source
- Compatible LG indoor units: High Static Ducted, Low Static Ducted, 1-Way Ceiling Cassette, 2-Way Ceiling Cassette, 4-Way Ceiling Cassette, and Ceiling Suspended

**Notes:**

1. For use with Multi V products only.
2. Must follow installation instructions in the applicable LG installation manual.

**Indoor Unit**

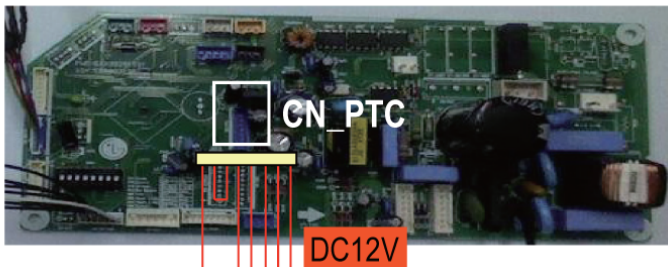


**PRARH1**



AC24V

AC24V

**Heater 1**

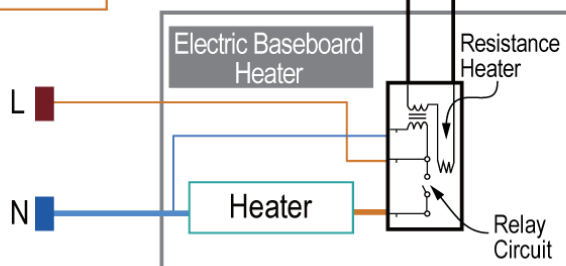

**Heater 2**

