Job Name/Location:					Tag #:			
Date:		For:	File	Resubmit				
PO No.:			Approval	Other			29	
Architect:	GC:					្នុងនេ	CLULP voi le	
Engr:	Mech	n:					Ŕ	<u>भ्राण</u> ्ड) ध <b>छ</b>
Ren:								

(Project Manager)

Heating Nominal Test Conditions:

Indoor: 70°F DB / 60°F WB

Outdoor: 47°F DB / 43°F WB

24,000

25,600

208-230/60/1

0.4

ø1/4

ø1/2

ø1/4

ø1/2

27/32,5/8

Thermistor

# (Company)

**Performance:** 

Cooling Nominal Test Conditions:

Power Supply  $(V'/Hz/\emptyset)$ 

Installed Liquid Pipe (in., O.D.)

Installed Vapor Pipe (in., O.D.)

Liquid Connection (in., O.D.)

Vapor Connection (in., O.D.)

Drain (in., O.D. / I.D.)

**Temperature Sensor** 

**Controls Features:** 

 Auto operation Auto restart
Chaos wind

4-Way auto swing
24-Hour on/off timer

Indoor: 80°F DB / 67°F WB

Rated Amps (A)

**Electrical:** 

Piping:

Outdoor: 95°F DB / 75°F WB

Nominal Cooling Capacity (Btu/h)

Nominal Heating Capacity (Btu/h)

# LMN249HVT Multi F Wall Mounted DUAL COOL Indoor Unit 24,000 Btu/h



# **Entering Mixed Air:**

Cooling (°F WB)	57 ~ 77
Heating (°F DB)	59 ~ 81

## Unit Data:

Refrigerant Type	R410A
Refrigerant Control	EEV
Sound Pressure (H/M/L) (±3 dB[A]) <sup>2</sup>	46 / 41 / 36
Primary Filter	Washable Pre-filter
Secondary Filter	3M Micro Dust
Net Weight (lbs.)	25.6
Shipping Weight (lbs.)	32.2

#### Fan:

Туре	Cross Flow
Type Quantity	1
Motor/Drive	Brushless Digitally Controlled/Direct
Air Flow H/M/L (CFM)	597 / 452 / 367

### Notes:

INOTES: 1. Acceptable operating voltage: 187V-253V. 2. Sound Pressure levels are tested in an anechoic chamber under ISO Standard 3745. 3. See Engineering Manual for sensible and latent capacities. 4. All communication / connection (power) cable from the outdoor unit to the indoor unit is field supplied and must be a minimum of four-conductor, 18 AWG, stranded, shielded or unshielded (if shielded, it must be grounded to the chassis of the outdoor unit only), and must comply with applicable local and national codes. 5. Power wiring cable size must comply with the applicable local and national code. 6. The indoor unit comes with a dry helium charge. 7. Corresponding refrigerant piping length is in accordance with standard length of each outdoor unit and the level difference is 0 ft. All capacities are net with a combination ratio between 95 - 105%. 8. Must follow installation instructions in the applicable LG installation manual.

Must follow installation instructions in the applicable LG installation manual.
 The 24k IDU includes a socket adapter for vapor refrigerant pipe connections.

#### **Included Accessories:**

Inverter (variable speed fan)

Wireless Remote Controller — PWLSSB21H

#### **Optional Accessories:**

- ☐ MultiSITE<sup>™</sup> CRC2 PREMTBVC2
- Dry Contact 3rd Party Controller PDRYCB320 Cable Extension Kit PZCWRC1
- Aux Heater Relay Kit PRARS1
- □ Programable Remote Contoller PREMTB100 Delux Remote Contoller - PREMTB200
- □ Group Controller Cable Kit PZCWRCG3



Self-cleaning indoor coil
Sleep mode
Condensate sensor connection


Built-in Wi-Fi via Smart ThinQ app

Jet cool/Jet heat
3M\_Micro Dust Filter





SB\_M © LG Electronics Canada, Inc., North York, ON. All rights reserved. "LG Life's Good" is a registered trademark of LG Corp. /www.lgdfs.ca

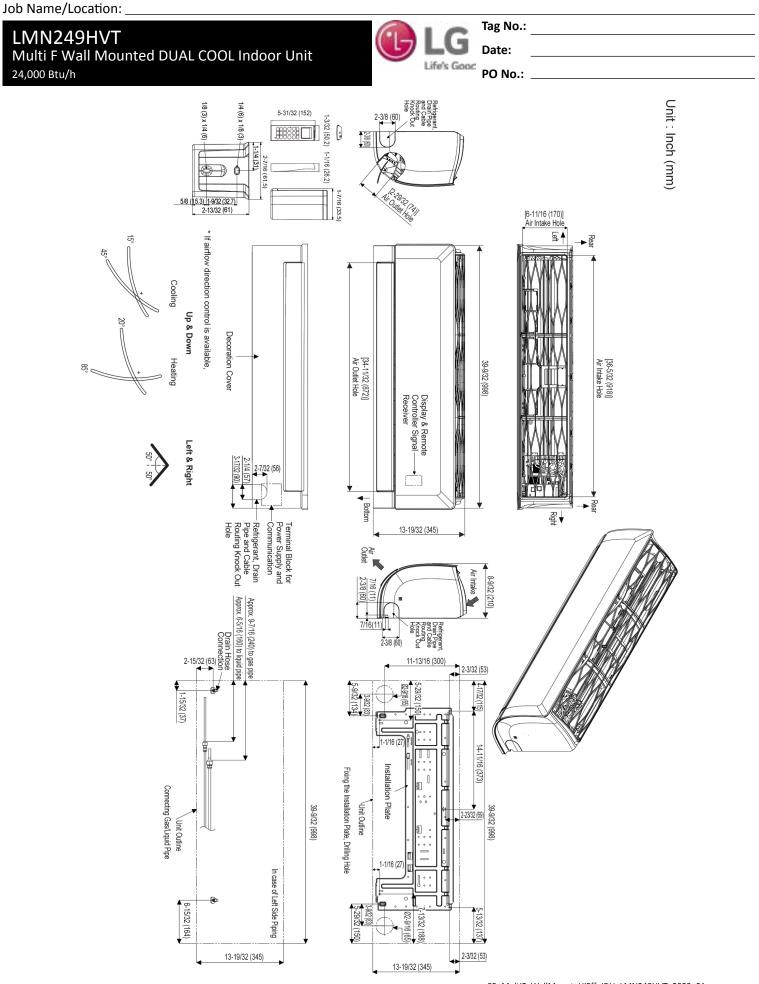

For continual product development, LG reserves the right to change specifications without notice. © LG Electronics Canada, Inc., North York, ON. All rights reserved. "LG Life's Good" is a registered trademark of LG Corp. /www.lgdfs.ca