

Date: \_\_\_\_\_ For:  File  Resubmit  
 PO No.: \_\_\_\_\_  Approval  Other \_\_\_\_\_

Architect: \_\_\_\_\_ GC: \_\_\_\_\_

Engr: \_\_\_\_\_ Mech: \_\_\_\_\_

Rep: \_\_\_\_\_  
 (Company) (Project Manager)

**ARUB330DT2** (a) ARUB134DT2  
 Multi V™ Sync II (b) ARUB115DT2  
 27.0 Ton Outdoor Unit (c) ARUB076DT2



**Performance:**

**Cooling Mode:**

Capacity (Btu/h)	324,800
Capacity (tons)	27.0
Power Input (kW)	26.2

**Heating Mode:**

Capacity (Btu/h)	365,400
Power Input (kW)	25.3

Cooling Nominal Test Conditions: Indoor: 80°F DB /67°F WB  
 Outdoor 95° DB  
 Heating Nominal Test Conditions: Indoor: 70°F DB  
 Outdoor 47°F DB /43°F WB

**Electrical:**

	(a) ARUB134DT2	(b) ARUB115DT2	(c) ARUB076DT2
Power Supply (V/Hz/Ph)	460/60/3	460/60/3	460/60/3
MOP (A)	40	35	25
MCA (A)	32	29	15
Rated Amps (A)	28.9	25.8	12.4
Compressor A (A)	15.0	13.0	10.0
Compressor B (A)	11.5	10.4	-
Fan Motor (A)	2.4	2.4	2.4
Max Starting Current (A)	83.9	76.8	-

**Piping:**

	(a) ARUB134DT2	(b) ARUB115DT2	(c) ARUB076DT2
Refrigerant Charge (lbs)	17.6	17.6	17.6
Liquid Line (in, OD)	1/2 Flare	1/2 Flare	3/8 Flare
Vapor Line High (in, OD)	3/4 Braze	3/4 Braze	5/8 Braze
Vapor Line Low (in, OD)	1-1/8 Braze	1-1/8 Braze	3/4 Braze

**Standard Features:**

- Limited Warranty with LG Certified Installation
  - Two Year Functional Parts Warranty
  - Additional Four Year Compressor Warranty
- Black Box Function
- Night Quiet Operation
- Fault Detection and Diagnosis

**Operating Range:**

Cooling (°F DB)	23 - 110
Heating (°F WB)	-4 - 60
Synchronous (°F DB)	14 -81

**Unit Data:**

Refrigerant Type	R410A
Refrigerant Control	EEV
Max Num of Indoor Units <sup>1</sup>	55
Sound Pressure <sup>2</sup> dB(A)	63
Net Unit Weight (a) + (b) + (c) (lbs)	628 + 628 + 529
Shipping Weight (a) + (b) + (c) (lbs)	664 + 664 + 566
Communication Cable (No. x AWG)	
Outdoor to Indoor <sup>3</sup>	2 x 18
Outdoor to Outdoor <sup>4</sup>	2 x 18
Heat Exchanger Coating	GoldFin™

**Compressor:**

Inverter Scroll Quantity	3
Constant Scroll Quantity	2
Oil / Type	PVE/FVC68D

**Fan:**

Type	Propeller
Quantity (a) + (b) + (c)	2 + 2 + 2
Motor/Drive	Brushless Digitally Controlled/Direct
Air Flow Rate (a) + (b) + (c) (CFM)	6,700 + 6,700 + 6,700

**Notes:**

- 1.The combination ratio must be between 50-130%.
- 2.Sound pressure levels are tested in an anechoic chamber under Korea Standard KSA0701 for the combination of outdoor units.
- 3.All communication cable to be minimum 18 AWG, 2-conductor, stranded, shielded and must comply with applicable local and national code. Cables terminate at each frame.
- 4.All communication cable to be minimum 18 AWG, 2-conductor, stranded and must comply with applicable local and national code. Cables terminate at each frame.
- 5.The data mentioned in the above tables is applied with non-ducted indoor units.
- 6.This data is rated 0 ft above sea level, with 25 ft of refrigerant line per indoor unit and a 0 ft level difference between outdoor and indoor units. All capacities are net with a combination ratio between 95 – 105%.
- 7.The voltage tolerance is ± 10%.
- 8.Power wiring cable size must comply with the applicable local and national code. Cables terminate at each frame.
- 9.Requires ARCNB20 and ARCNB30 connecting branch pipes to connect components.



Job Name/Location:

**ARUB330DT2**  
 Multi V™ Sync II  
 27.0 Ton Outdoor Unit


(a) ARUB134DT2  
 (b) ARUB115DT2  
 (c) ARUB076DT2



Tag #:

Date:

PO No.:

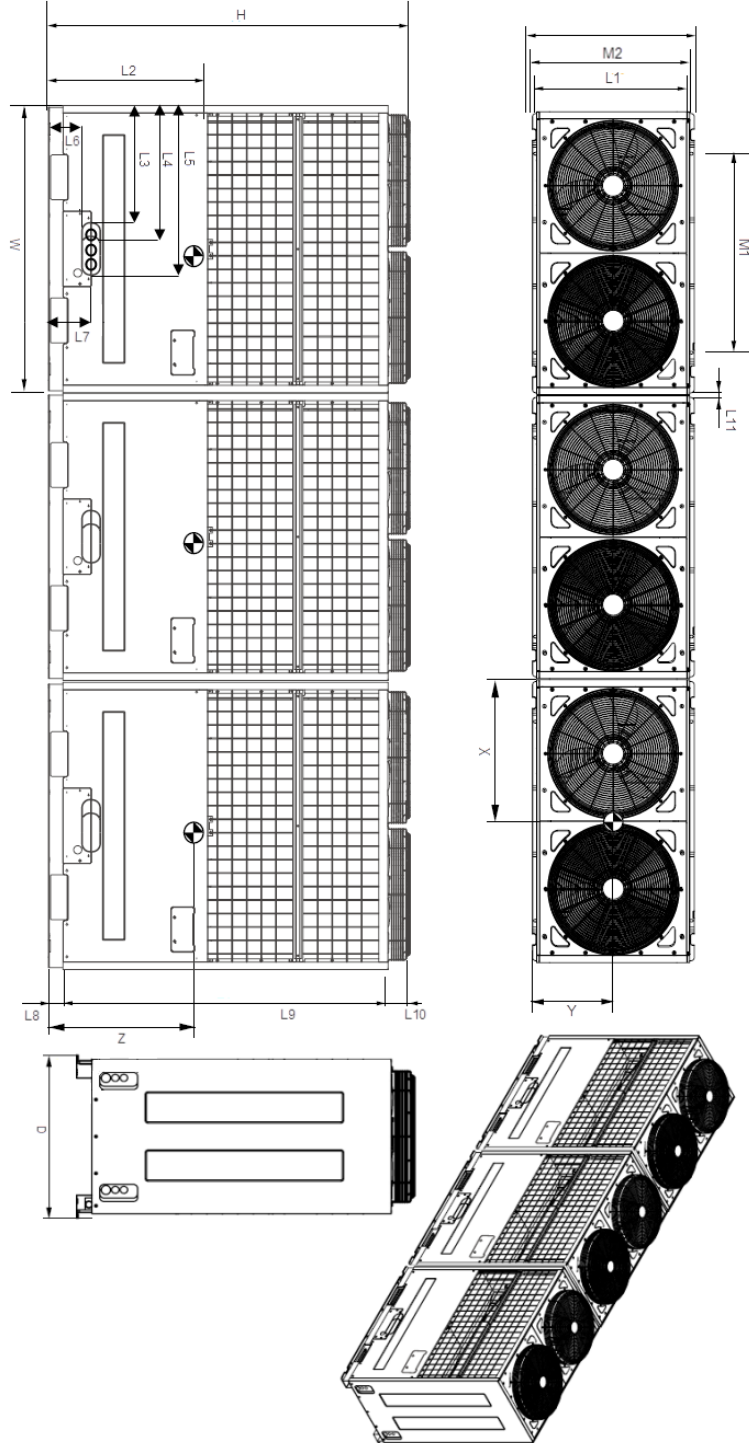

**Center of Gravity**

	(a) ARUB134DT2	(b) ARUB115DT2	(c) ARUB076DT2
X	21-3/4	21-3/4	19-7/16
Y	12	12	10-1/8
Z	21-5/16	21-5/16	22-5/8

= Center of Gravity

W	50-3/8
H	63-5/16
D	28-11/16
L1	27-3/8
L2	27-11/16
L3	20-5/8
L4	23
L5	29-7/8
L6	7-3/8
L7	5-7/8
L8	3-3/16
L9	56-1/8
L10	3-7/8
M1	35-7/16
M2	27-9/16

Note - All dimensions have a tolerance of ± 0.25 in.