

Date: _____ For: File Resubmit
 PO No.: _____ Approval Other _____
 Architect: _____ GC: _____
 Engr: _____ Mech: _____
 Rep: _____
 (Company) (Project Manager)



ARNU243BHA4
 Multi V™ Ducted (High Static)
 24,200 Btu/h Indoor Unit



Performance:

| | |
|--------------------------------|--------|
| Total Cooling Capacity (Btu/h) | 24,200 |
| Heating Capacity (Btu/h) | 27,300 |
| Power Input ¹ (W) | 150 |

Cooling Nominal Test Conditions: Heating Nominal Test Conditions:
 Indoor: 80°F DB/67°F WB Indoor: 70°F DB
 Outdoor: 95°F DB Outdoor: 47°F DB/43°F WB

Electrical:

| | |
|-----------------------|--------------|
| Power Supply (V/Hz/Ø) | 208-230/60/1 |
| Rated Amps (A) | 1.06 |

Piping:

Refrigerant:

| | |
|----------------------|-----------|
| Liquid Line (in, OD) | 3/8 Flare |
| Vapor Line (in, OD) | 5/8 Flare |

Condensate:

| | |
|---|---------|
| Condensate Pump Drain ² (in, ID) | 1 Plain |
| Gravity Drain Plugged (in, OD) | 1 MPT |

Controls Features:

- Auto changeover (Heat Recovery only)
- Auto operation
- Auto restart
- Child lock
- Dual thermistor control
- Group control
- Hot start
- Self diagnostics
- Sleep mode
- Timer (on/off)
- Dual Setpoint Control
- Weekly schedule
- External on/off control
- Fan speed control
- Multiple aux heater applications
- Filter life and power consumption display

Optional Accessories:

- Wireless Handheld Remote Controller³ - PQWRHQ0FDB
- LG Programmable Thermostat - PREMTB10U
- LG Premium Controller - PREMTA000
- Simple Controller with Mode (Black) - PQRVCLOQ
- Simple Controller with Mode (White) - PQRVCLOQW
- Simple Controller without Mode (Black) PQRCHCAOQ
- Simple Controller without Mode (White) - PQRCHCAOQW
- Simple Dry Contact (1 contact, 24 VAC external power) - PDRYCB100
- Dry Contact with Economizer- PQDSBC1
- Dry Contact for Third Party Thermostat - PDRYCB300
- Wall Mounted Temperature Sensor - PQRSTAO
- Remote Temperature Button Sensor - ZRTBS01
- High Efficiency Filter Box for BH HSD Chassis - ZFBXBH01A
- Dynamic V8 2VL Low Profile Air Cleaner - ZFBXD201A
- Dynamic V8 4VL Air Cleaner - ZFBXD401A
- Return Air Grille - Louvered (one per plenum) - ZGRLRA01A
- Return Air Grille - Egg Crate (one per plenum) - ZGRLRA02A
- 2VL Low Profile Return Air Plenum - ZPLMV201A
- 4VL Return Air Plenum - ZPLMV402A
- Aux Heater Kit - PRARH1

Entering Mixed Air:

| | |
|----------------------------------|----|
| Cooling Max ⁴ (°F WB) | 76 |
| Heating Min (°F DB) | 59 |

Unit Data:

| | |
|---|-------------------------|
| Refrigerant Type | R410A |
| Refrigerant Control | EEV |
| Sound Pressure ⁵ dB(A) (H/M/L) | 42/41/40 |
| Filter Type | Washable |
| MERV | N/A |
| Filter Quantity | 1 |
| Filter Dimensions ⁶ | 7-1/2" x 30-3/4" x 1/4" |
| Net Unit Weight (lbs) | 58 |
| Shipping Weight (lbs) | 68 |

Fan:

| | |
|---|---------------------------------------|
| Type | Sirocco |
| Fan Quantity | 2 |
| Motor/Drive | Brushless Digitally Controlled/Direct |
| Motor Quantity | 1 |
| Standard Mode Airflow Rate H/M/L (CFM) | 618 / 519 / 445 |
| Standard Mode External Static Pressure (ESP) ⁷ (in wg) | 0.23 |
| High Mode Airflow Rate H/M/L (CFM) | 565 / 509 / 459 |
| High Mode External Static Pressure (ESP) ⁷ (in wg) | 0.31 |
| Minimum ESP (in wg) ⁸ | 0.12 |
| Maximum ESP (in wg) ⁸ | 0.47 |

Notes:


1. The Power Input is rated at high speed.
2. Maximum lift is 27 in from bottom of unit. Check valve not included (field supplied).
3. Requires an LG Programmable Thermostat, Simple Controller with Mode or a Simple Controller without Mode.
4. See Engineering Manual for sensible and latent capacities.
5. Sound Pressure levels are tested in an anechoic chamber under ISO Standard 3745.
6. Actual filter sizes may vary.
7. At factory fan speed setting.
8. Maximum static pressure may result in reduced airflow (CFM).
9. All communication cable to be minimum 18 American wire gage (AWG), 2-conductor, stranded, shielded or unshielded wire and must comply with applicable local and national code. If shielded, the wire must be grounded to the chassis at the outdoor unit only.
10. Power wiring cable size must comply with the applicable local and national code.
11. This unit comes with a dry nitrogen charge.
12. This data is rated 0 ft above sea level, with 25 ft of refrigerant line per indoor unit and a 0 ft level difference between outdoor and indoor units. All capacities are net with a combination ratio between 95 – 105%.
13. Must follow installation instructions in the applicable LG installation manual.



ARNU243BHA4
 Multi V™ Ducted (High Static)
 24,200 Btu/h Indoor Unit



Tag #: _____
 Date: _____
 PO No.: _____

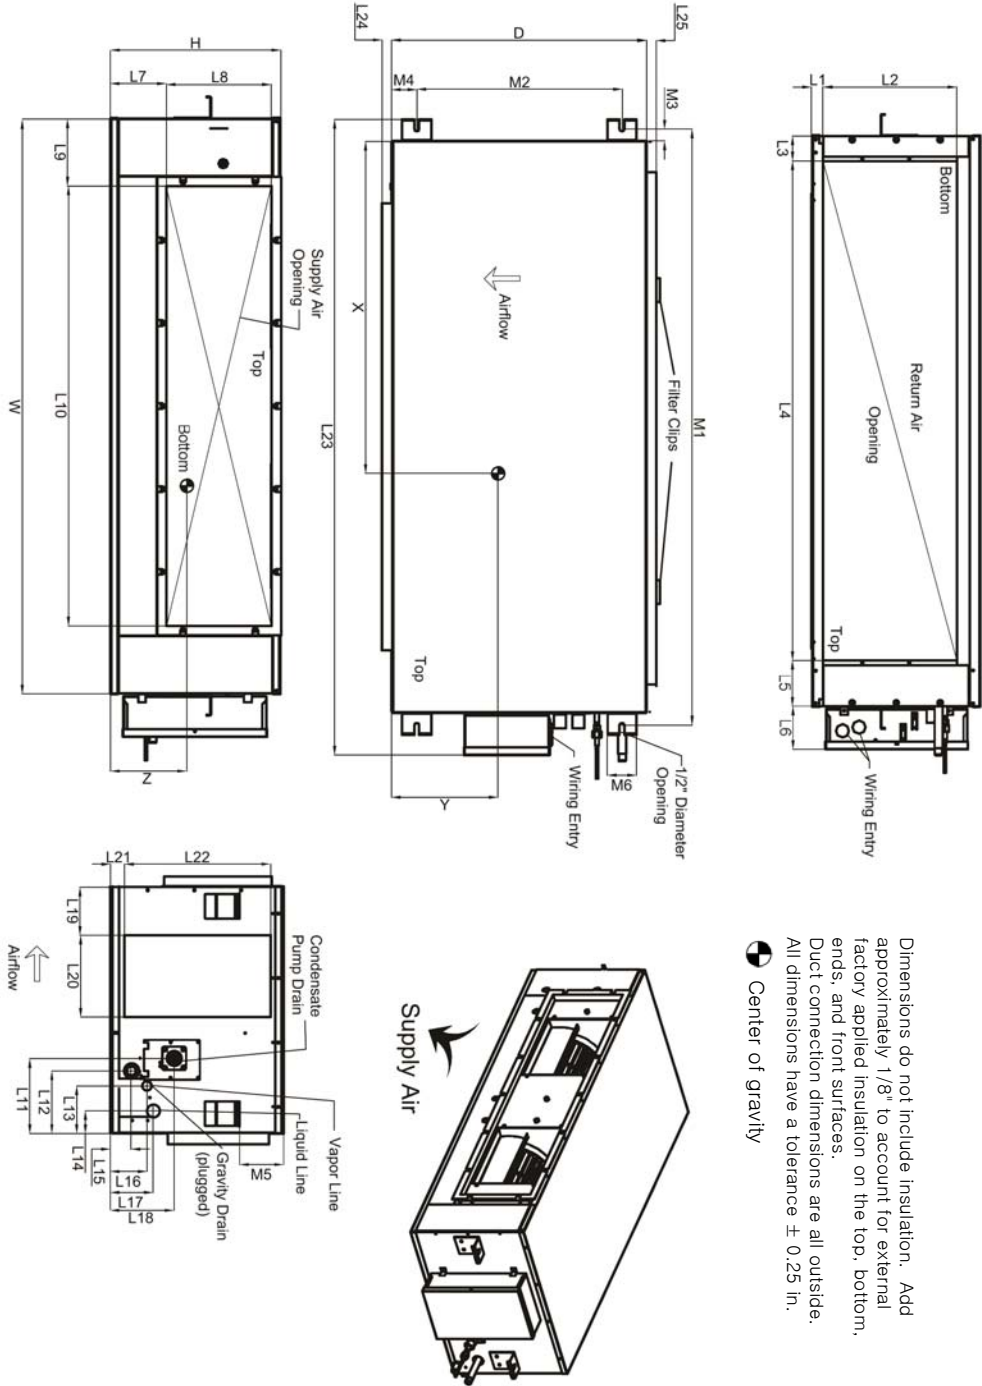

Dimensions do not include insulation. Add approximately 1/8" to account for external factory applied insulation on the top, bottom, ends, and front surfaces.
 Duct connection dimensions are all outside. All dimensions have a tolerance ± 0.25 in.
 ⊕ Center of gravity

* No flange/filter, retainer clips only

| | |
|------|-----------|
| W | 34-3/4" |
| D | 17-3/4" |
| H | 10-1/4" |
| L1 | 13/16" |
| L2 | 6-3/8" |
| L3 | 7/8" |
| L4 | 29-1/2" |
| L5 | 4-1/2" |
| L6 | 4-1/2" |
| L7 | 2-7/8" |
| L8 | 6-1/4" |
| L9 | 1-5/8" |
| L10 | 29-1/2" |
| L11 | 6-5/8" |
| L12 | 6-5/8" |
| L13 | 3-15/16" |
| L14 | 1-7/8" |
| L15 | 1" |
| L16 | 3-1/4" |
| L17 | 3-15/16" |
| L18 | 7" |
| L19 | 3-3/16" |
| L20 | 4-13/16" |
| L21 | 0" |
| L22 | 10-1/4" |
| L23 | 41-3/8" |
| L24 | 1-3/16" |
| L25* | 0" |
| M1 | 36-11/16" |
| M2 | 14" |
| M3 | 1" |
| M4 | 1-7/8" |
| M5 | 2-1/2" |
| M6 | 2" |
| X | 15-7/8" |
| Y | 8-5/8" |
| Z | 4-11/16" |

Center of Gravity
 ARNU243BHA4