

Job Name/Location:

Date:

For:  File  Resubmit

PO No.:

Approval  Other \_\_\_\_\_

Architect:

GC:

Engr:

Mech:

Rep:

(Company)

(Project Manager)

PQWRHQ0FDB

Wireless Remote Controller - Multi V™



PQWRHQ0FDB

### Unit Data:

Max Number of Indoor Units (Group Control)	16
Temperature Value	Fahrenheit (1° Increments)/Celsius
Dimensions	6-3/16" L x 2-3/16" W x 1- 3/16" H
Weight	6.35 oz

Temperature Value depends on equipment.

### Electrical:

Power Supply	2 AAA Batteries Included
--------------	--------------------------

### Temperature Setting Range:


Cooling (°F)	64-86
Heating (°F)	60-86
Auto (°F)	64-86

### Standard Features:

- Unit Operation – On/Off
- Temperature Setting
- Display Current Temperature
- Mode Selection – Cool/Heat/Dry/Fan/Auto
- Fan Speed Selection
- Air Flow Direction
- Jet Cool
- Auxiliary Heat
- Timer
- Clock
- Sleep Mode
- Master/slave Configuration
- 2 Controllers for 1 Indoor Unit
- On/Off LED Display
- LCD Luminosity
- Plasma Purification
- Auto Smart Clean
- Main/Sub Indoor Unit Setting
- Temperature Difference Setting
- Function Lock

### Notes:

Available functions/features may differ based on connected system.  
Must follow installation instructions in the applicable LG installation manual.

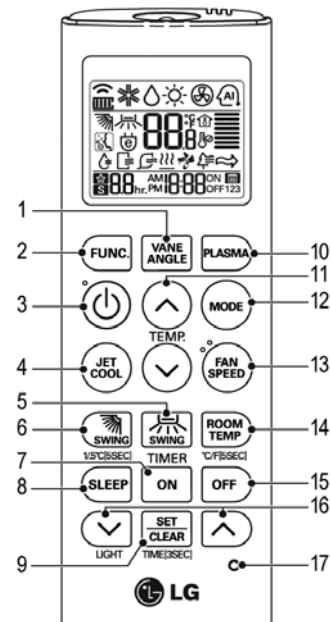

### Callout Legend:

- 1 - Vane Angle
- 2 - Function Setting
- 3 - On/Off Button
- 4 - Jet Cool
- 5 - Airflow Button (Left/Right) – [Optional]
- 6 - Airflow Button (Up/Down)
- 7 - On [Timer]
- 8 - Sleep [Timer]
- 9 - Set/Clear
- 10 - Plasma [Optional]
- 11 - Room Temperature Setting (2 buttons)
- 12 - Mode (Operation Selection)
- 13 - Fan Speed (Indoor fan speed selection)
- 14 - Room Temp (Check room temperature)
- 15 - Off [Timer]
- 16 - Timer Setting (Up/Down) two buttons
- 17 - Reset