Job Name/Location:

LMU36CHV

Performance:

Multi F Inverter Heat Pump Outdoor Unit

Cooling Capacity (Min.-Rated-Max., Btu/h)

Heating Capacity (Min.-Rated-Max., Btu/h) Max. Heating Capacity at 17°F (Btu/h)

Max. Heating Capacity at 5°F (Btu/h)* Max. Heating Capacity at -4°F (Btu/h)

HSPF - Heating SeasonPerformace Factor *The capacities at 5°F does not refer to H42 testing conditions.

Cooling COP @95°F (Rated)

Heating COP @47°F (Rated)

SEER 2 (Ducted / Non-Ducted)

EER 2 (Ducted / Non-Ducted)

HSPF 2 (Non-Ducted)

Cooling Nominal Test Conditions:

Power Supply (V/Hz/Ø)¹

Cooling Rated Amps (A)

Heating Rated Amps (A)

Locked Rotor Amps (A)

MOP - Maximum Overcurrent Protection

Refrigerant Charge (lbs.)

Liquid Line Connection (in., O.D.)

Vapor Line Connection (in., O.D.)

Min. / Max. ODU to IDU Piping (ft.)

Piping Length (no add'l refrigerant, ft.)

Maximum Elevation between ODU and IDU (ft.)

Maximum Elevation between IDU and IDU (ft.)

Maximum Total Piping² (ft.)

Compressor (A)

Fan Motor (A)

ODU = Outdoor Unit

Auto operation

Features:

Piping:

Recommended Fuse Size (A)

HSPF 2 (Ducted)

Indoor: 80°F DB / 67°F WB

Electrical:

MOP (A)

MCA (A)

Outdoor: 95°F DB / 75°F WB

Engr: Rep:

(Company)

Date:	Fo	r:	File	Resubmit
PO No.:			Approval	Other
Architect:	GC:			

Heating Nominal Test Conditions:

MCA - Minimum Circuit Ampacity

IDU = Indoor Unit

• Soft start

• Self diagnosis

Indoor: 70°F DB / 60°F WB

Outdoor: 47°F DB / 43°F WB

Mech:

(Project Manager)

8,400~32,800~38,400

28,400

25,200

20,800

18.2 / 22.0

11.0 / 13.0

208-230V, 60, 1

25

25

18.4

15.03

15.03

13.5

0.73

19.0

6.17

1/4 x 4

3/8 x 4

9.8 / 82.0

246.1

98.4

49.2

24.6

8.2 / 6.3

8.5/6.6

3.7

3.9

10,080~36,000~41,600

Lawrences	1
SS MA	LG
NY	



Operating Range:

Cooling (°F DB)	14 to 118
Heating (°F WB)	-4 to +64

Unit Data:

R410A
EEV
51 / 54
138.9 / 154.3
Gold Fin™
2
4

Compressor:

Туре	Twin Rotary
Quantity	1
Oil / Type	FVC68D

Ean

raii.	
Туре	Propeller
Quantity	1
Motor / Drive	Brushless Digitally Controlled/Direct
Max. Airflow Rate (CFM)	2.119

Notes:

1. Acceptable operating voltage: 187V - 253V.

2. Piping lengths are equivalent.

- 3. Sound pressure levels are tested in an anechoic chamber under ISO Standard 3745
- 4. All power / communication cable to be minimum 14 AWG, 4-conductor, stranded, shielded or unshielded wire, and must comply with applicable local and national codes. If shielded, the wire must be grounded to the chassis at the outdoor unit only.

5. Power wiring size must comply with the applicable local and national codes. 6. This data is rated 0 ft. above sea level, with 0 ft. level difference between outdoor

- and indoor units, and the following refrigerant pipe lengths:
- LMU180HV: 16.4 ft. x 2 = 32.8 ft. LMU240HV: 16.4 ft. x 3 = 49.2 ft.
- LMU30CHV: 16.4 ft. x 4 = 65.6 ft.
- LMU36CHV: 16.4 ft. x 4 = 65.6 ft.

162279

- All capacities are net with a combination ratio between 95 105%.
- 7. Must follow installation instructions in the applicable LG installation manual.
- 8. Refer to the Combintion Data Manual for combination capacity tables.
- 9. See the Performance Data Manual for sensible and latent capacities.

- Auto restart • Inverter (variable speed compressor) Defrost / Deicing
- **Optional Accessories:**

□ PI-485 - PMNFP14A1

- AC Smart 5 PACS5A000
- Drain Pan Heater PQSH1200

Without PQCA0 cooling to 0°F

Low Ambient Kit -40°F cooling PQCA0, PAG-HS6 / PAG-HS7 Wind Baffle.



For a complete list of available accessories, contact your LG representative

For continual product development, LG reserves the right to change specifications without notice.

© LG Electronics Canada., Inc., North York, ON. All rights reserved. "LG Life's Good" is a registered trademark of LG Corp. /www.lgdfs.ca

Restart delay (three [3] minutes)

Low ambient cooling down to 14°F


Certification applies only when the complete system s listed with AHRI.


Unitary Small HP AHRI Standard 210/240


ahridirectory.org

LMU36CHV Multi F Inverter Heat Pump Outdoor Unit




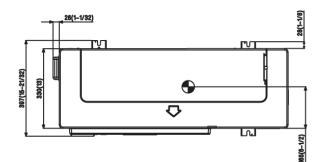



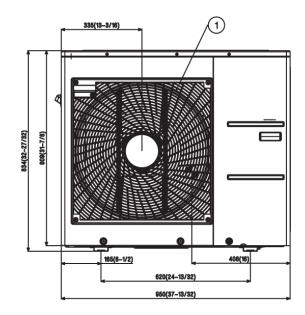

No.	Part Name
1	Air discharge grille
2	Vapor pipe connection
3	Liquid pipe connection
4	Main service valve (Liquid)
5	Main service valve (Vapor)

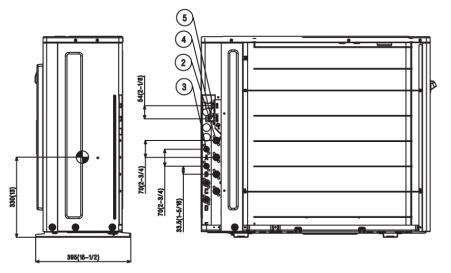

Notes:

- 1. Unit must be installed in compliance with the installation manual.
- 2. Unit must be grounded in accordance with the local or state regulations and applicable national codes.
- 3. All field-supplied electrical components and materials must comply with local, state, and national codes.
- 4. Electrical characteristics must be considered for electrical work and design. The capacity of power cable and circuit breaker for the outdoor unit must follow local, state, national, and manufacturer requirements.