

Job Name/Location:

Tag #:

Date:

For: File Resubmit
 Approval Other _____

PO No.:

Architect: _____ GC: _____

Engr: _____ Mech: _____

Rep: _____
 (Company) (Project Manager)



ARUN096CTE4
 Multi V™ IV Heat Pump 575V
 8.0 Ton Outdoor Unit



Performance:

Cooling Mode:

Nominal Capacity (Btu/h)	96,000
Power Input ¹ (kW)	5.76

Heating Mode:

Nominal Capacity (Btu/h)	108,000
Power Input ¹ (kW)	6.76

Nominal Capacity is outside the scope of AHRI Standard 1230 and based on the following conditions:
 Indoor: 80°F DB / 67°F WB Indoor: 70°F DB
 Outdoor: 95°F DB Outdoor: 47°F DB / 43°F WB

Electrical:

Power Supply (V/Hz/Ø)	575/60/3
MOP (A)	25
MCA (A)	17.5
Rated Amps (A)	14.5
Compressor A (A)	11.9
Compressor B (A)	-
Fan (A)	2.6

Piping:

Refrigerant Charge (lbs)	23.6
Liquid Line (in, OD)	3/8
Vapor Line (in, OD)	7/8

Standard Features:

- HiPORA (high pressure oil return)
- Smart Oil Control
- Split Coil Defrost
- Night Quiet Operation
- Fault Detection and Diagnosis

Optional Accessories:

- Air Guide - PRAGX350 (2 required)

Operating Range:

Cooling (°F WB)	14-122
Heating (°F DB)	-13 - 61

Unit Data:

Refrigerant Type	R410A
Refrigerant Control	EEV
Max Number of Indoor Units ²	16
Sound Pressure ³ dB(A)	59.0
Net Unit Weight (lbs)	540
Shipping Weight (lbs)	573
Communication Cable ⁴ (No x AWG)	2 x 18
Heat Exchanger Coating	GoldFin™

Compressor:

Type	HSS DC Scroll
Quantity	1
Oil/Type	PVE/FVC68D

Fan:

Type	Propeller
Quantity	2
Motor/Drive	Brushless Digitally Controlled/Direct
Air Flow Rate (CFM)	9,850

Notes:

- 1.For AHRI ratings, refer to the AHRI website <http://www.ahridirectory.org>(will be registered).
- 2.The combination ratio must be between 50 – 130%.
- 3.Sound Pressure levels are tested in an anechoic chamber under ISO Standard 3745.
- 4.All communication cable to be minimum 18 AWG, 2-conductor, stranded, shielded and must comply with applicable local and national code.
- 5.Nominal data is rated 0 ft above sea level, with 25 ft of refrigerant line per indoor unit and a 0 ft level difference between outdoor and indoor units. All capacities are net with a combination ratio between 95-105%.
- 6.The voltage tolerance is ± 10%.
- 7.Power wiring cable size must comply with the applicable local and national code.




ARUN096CTE4
 Multi V™ IV Heat Pump 575V
 8.0 Ton Outdoor Unit



Tag #:

Date:

PO No.:

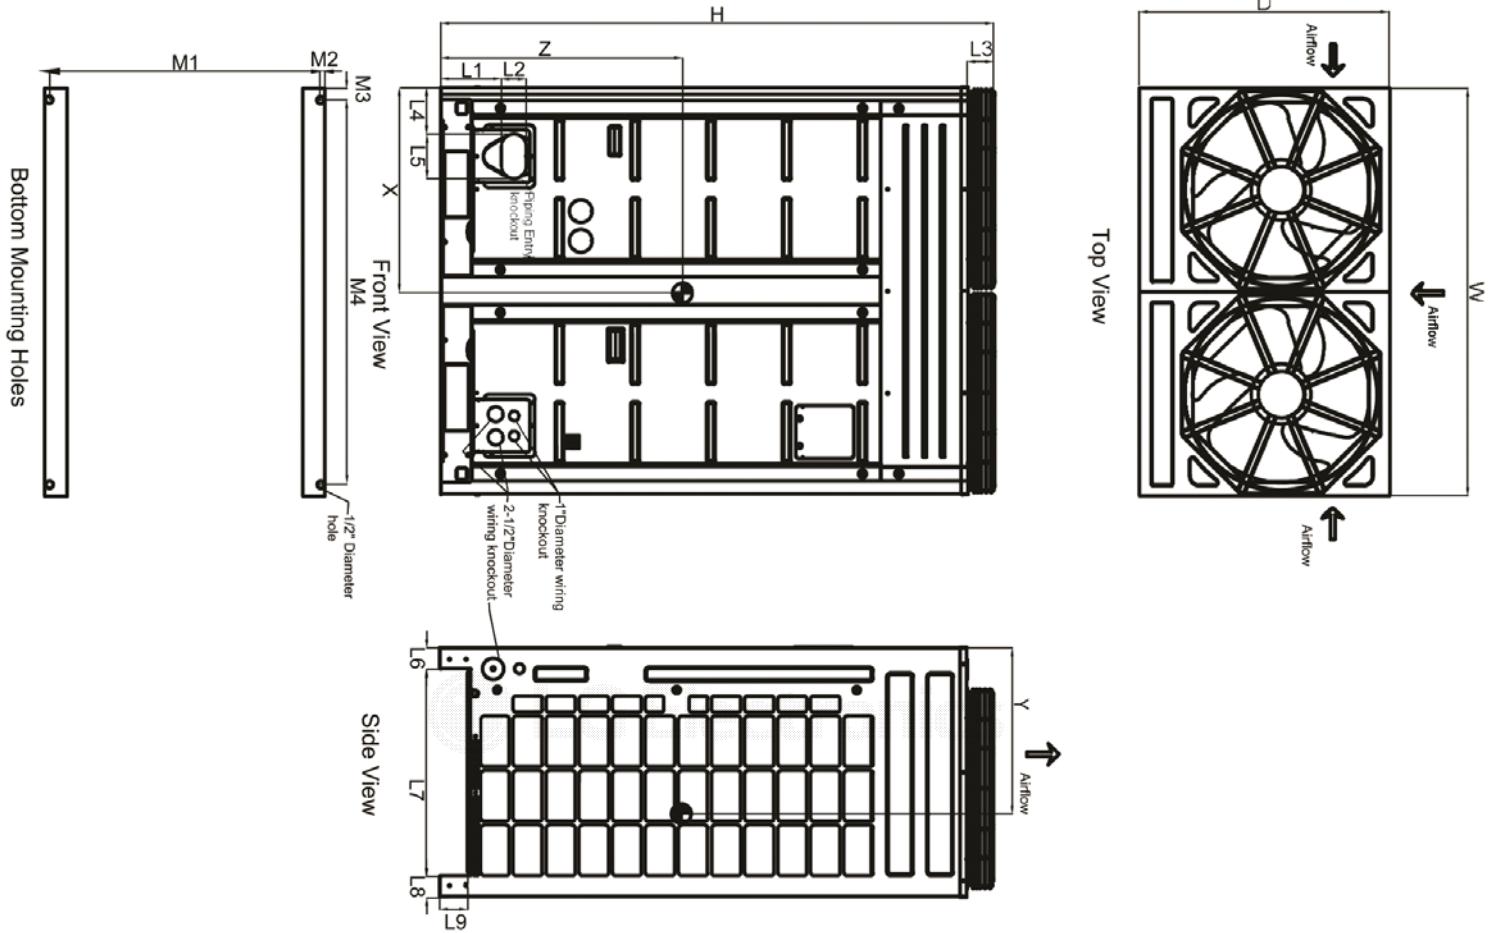

W	48-13/16"
D	29-15/16"
H	66-1/8"
L1	7-1/4"
L2	2-15/16"
L3	3-1/8"
L4	5-1/2"
L5	5-3/8"
L6	2-9/16"
L7	24-3/16"
L8	2-9/16"
L9	3-5/16"
M1	29-1/16"
M2	7/16"
M3	2-5/8"
M4	43-3/8"

Center of Gravity

X	17-5/8"
Y	13-1/2"
Z	29-5/8"

Note - All dimensions have a tolerance of ± 0.25 in.



= Center of Gravity