

Job Name/Location:

Tag No.:

Date:

For:	File	Resubmit
	Approval	Other_____

PO No.:

Architect:

GC:

Engr:

Mech:

Rep:

(Company)

(Project Manager)

ARNU183TQD4

Multi V™ Four-Way 2' x 2' Ceiling Cassette

19,100 Btu/h Indoor Unit

**Performance:**

Cooling Capacity (Btu/h) ¹	19,100
Heating Capacity (Btu/h) ¹	21,500
Power Input ²	30

Rated capacity is certified under AHRI Standard 1230. Ratings are subject to change without notice. Current certified ratings are available at www.ahridirectory.org.

Electrical:

Power Supply (V/Hz/Ø)	208-230/60/1
Rated Amps	0.20

Piping:

Refrigerant	
Liquid Line (in., O.D.)	1/4 Flare
Vapor Line (in., O.D.)	1/2 Flare
Condensate	
Condensate Line (in., I.D.)	1
Factory Installed Pump ³	Yes

Controls Features:

- | | | |
|--|--|---------------------------|
| • Auto changeover (Heat Recovery only) | • Auto direction/ swing (up/down) | • Child lock |
| • Auto operation | • Swirl wind (alternating vanes) | • Group control |
| • Auto restart | • Fan speed control | • High ceiling |
| • Dual thermistor control | • Jet cool (fast cooling) | • Hot start |
| • Dual setpoint control | • Filter life display | • Self diagnostics |
| • Timer (on/off) | • Multiple auxiliary heater applications | • External on/off control |
| • Weekly schedule | | • Wi-Fi compatible |
| | | • Auto fan |
| | | • Leak detection |

Required Accessories:

- ☐ Grille Kit (27-9/16" x 27-9/16") - PT-UQC, or
- ☐ Grille Kit (24-7/16" x 24-7/16") - PT-QCHW0

Optional Accessories:

- ☐ Wireless Remote Controller - PQWRHQ0FDB
- ☐ MultiSITE™ CRC1 Controller - PREMTBVC0
- ☐ MultiSITE™ CRC1+ Controller - PREMTBVC1
- ☐ Simple Remote Controller - PREMTCC00U
- ☐ Premium Remote Controller - PREMTA000
- ☐ Remote Temperature Button Sensor - ZRTBS01
- ☐ Simple Dry Contact (1 contact, 24 VAC external power) - PDRYCB100
- ☐ Dry Contact for Third Party Thermostat - PDRYCB300
- ☐ Dry Contact for Economizer - PDRYCB400
- ☐ Ventilation Kit - PTVK430
- ☐ Cassette Decorative Cover - PTDCQ
- ☐ Plasma Filter Kit - PTPKQ0
- ☐ Auxiliary Heater Kit - PRARH1
- ☐ Wi-Fi Module - PWFMD200

Entering Mixed Air:

Cooling Maximum ¹ (°F WB)	76
Heating Minimum (°F DB)	59

Unit Data:

Refrigerant Type	R410A
Refrigerant Control	EEV
Sound Pressure dB(A) (H/M/L) ⁴	37 / 35 / 34
Primary Filter Type	Washable
Secondary Filter Type ⁵	Plasma
Unit Net Weight (lbs.)	35
Unit Shipping Weight (lbs.)	40
Grille Net Weight (lbs.)	7
Grille Shipping Weight (lbs.)	11

Fan:

Type	Turbo
Quantity	1
Motor/Drive	Brushless Digitally Controlled/Direct
Motor Quantity	1
Air Flow Rate H/M/L (CFM)	396 / 388 / 353

Notes:









- See Engineering Manual for sensible and latent capacities.
- The Power Input is rated at high speed.
- Maximum lift is 27-1/2 inches from bottom of unit.
- Sound Pressure levels are tested in an anechoic chamber under ISO Standard 3745.
- Communication cable between Master outdoor units to indoor units / heat recovery units to be 18 AWG, 2-conductor, twisted, stranded, shielded. Ensure the communication cable shield is properly grounded to the Master outdoor unit chassis only. Do not ground the outdoor unit to indoor units / heat recovery units communication cable at any other point. Wiring must comply with all applicable local and national codes.
- Power wiring is field provided, and must comply with the applicable local and national codes.
- This unit comes with a dry nitrogen charge.
- All capacities are net with a combination ratio between 95 – 105%.
- Must follow installation instructions in the applicable LG installation manual.



ARNU183TQD4
Multi V™ Four-Way 2' x 2' Ceiling Cassette
19,100 Btu/h Indoor Unit



Tag No.: _____
Date: _____
PO No.: _____

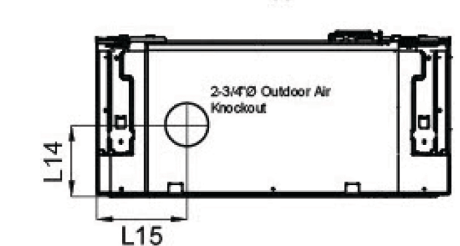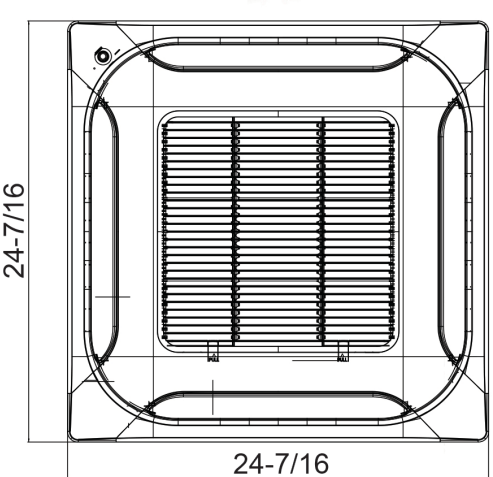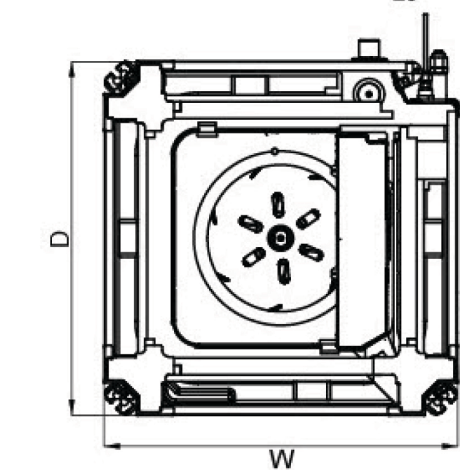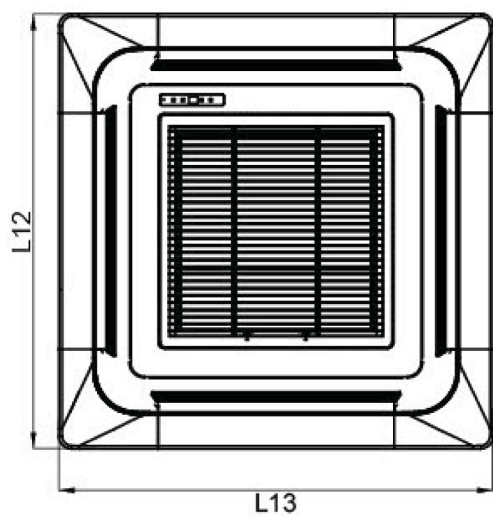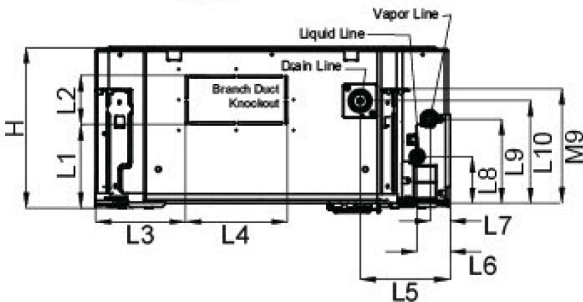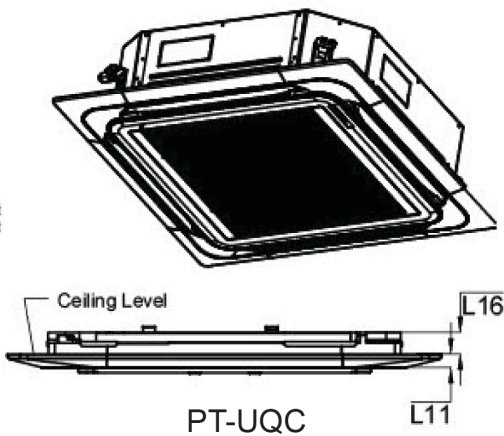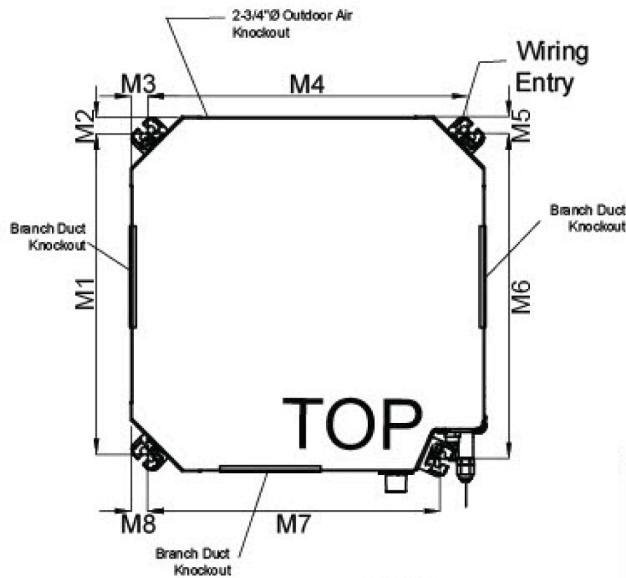

Note - All dimensions have a tolerance of ± 0.25 in.

W	22-7/16"
H	10"
D	22-7/16"
L1	5"
L2	3-1/8"
L3	5-13/16"
L4	6-1/2"
L5	5-5/8"
L6	1-15/16"
L7	1-3/16"
L8	2-11/16"
L9	5-1/16"
L10	6-1/4"
L11	7/8"
L12	27-9/16
L13	27-9/16"
L14	3-1/8"
L15	5-5/8"
L16	1-3/16"
M1	20-3/8"
M2	1-1/16"
M3	1-1/16"
M4	20-3/8"
M5	1-1/16"
M6	20-5/8"
M7	18-3/16"
M8	1-1/16"
M9	6-5/16"