

Job Name/Location:

Tag #:

Date: _____

For: File Appro Resubmit

PO No.: _____

val Other _____

Architect: _____

GC: _____

Engr: _____

Mech: _____

Rep: _____

(Company)

(Project Manager)

ACHH050VBAB
Inverter Scroll Chiller 208-230V
50.0 Ton



Performance :

Cooling Mode :

Cooling Capacity (MBH)	583.0
Power input (kW)	54.3

Heating Mode :

Heating Capacity (MBH)	614.1
Power input (kW)	57.1

Cooling Capacity Conditions : 95°F Ambient Air, 55°F EWT and 45°F LWT
 Heating Capacity Conditions : 47°F EWT and 120°F LWT

Electrical :

Power Supply (V / Hz / Ø)	208-230 / 60 / 3
MOP (A)	80 / 150
MCA (A)	77.3 / 146.1

Evaporator :

Quantity	3
Pressure Drop (ftAq)	2.7
Operating Maximum Pressure (Refrigerant / Water) (psi)	597 / 142
Cooling Water Flow (10F Delta) (GPM)	116.7
Inlet / Outlet Water Connection (Inches / Flange)	2-1/2" / 150lb

Standard Features

- Condenser Coil Coating Rated at 10,000 Hrs (Tested per ASTM B-117)
- Variable Speed Condenser Fan Motors
- Variable Speed Compressors
- SCCR Standard on 208 – 230V – 3PH (Approved per CSA (C-US/162279))
- Rated Sound Pressure at 30' is 51-60dB(A)
- 100% Heating Capacity down to 32°F
- 120F LWT at 17°F = 80% of Full Capacity

Operating Range :

Cooling (°F DB)	5 – 122
Supply Water Temperature	14 – 68
Heating (°F WB)	-22 – 95
Supply Water Temperature	86 - 131

Unit Data :

Refrigerant Type	R410a
Cooling Sound Power dB(A)	87
Heating Sound Power dB(A)	87
Net Unit Weight (lbs)	3,208
Unit Dimension (W x H x D) (ins)	90-3/15" x 86-5/8" x 84-13/16
Heat Exchanger Coating	Black Coated Fin

Sound Data tested per ANSI/AHRI Standard 370-2015 (Based on individual systems)

Compressor :

Compressor Type	Inverter Scroll
No. of Compressors	6
Oil Type	PVE
Oil Charge of Each Compressor (oz/ea)	33.8

Fan :

Type	Propeller
Quantity	6
Motor / Drive	Brushless Digitally Controlled / Direct
Air Flow Rate (CFM)	8,684

Notes :

1. For AHRI Ratings, refer to AHRI website <http://www.ahridirectory.org>
2. Power wiring able size must comply with the applicable local and national code
3. The voltage tolerance is +/- 10%



Job Name/Location:

Tag #:

Date:

For: File Appro Resubmit

PO No.:

val Other

Architect:

GC:

Engr:

Mech:

Rep:





(Company)

(Project Manager)

ACHH050VBAB

Inverter Scroll Chiller 208-230V

50.0 Ton

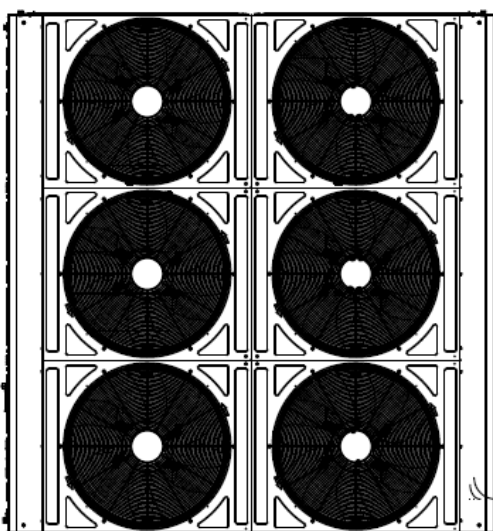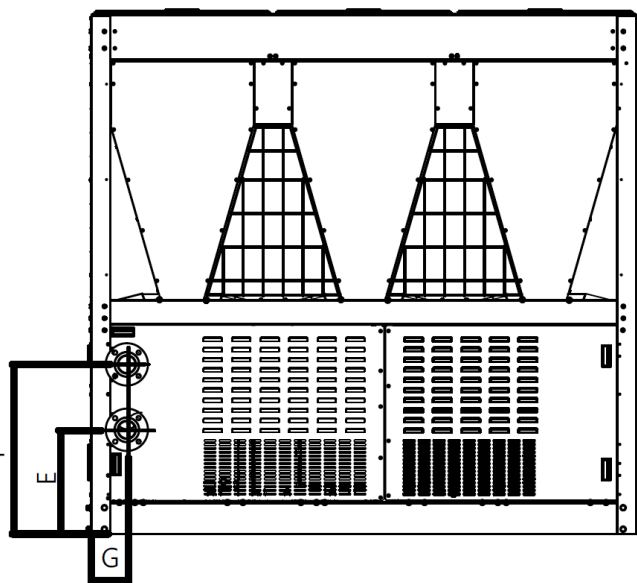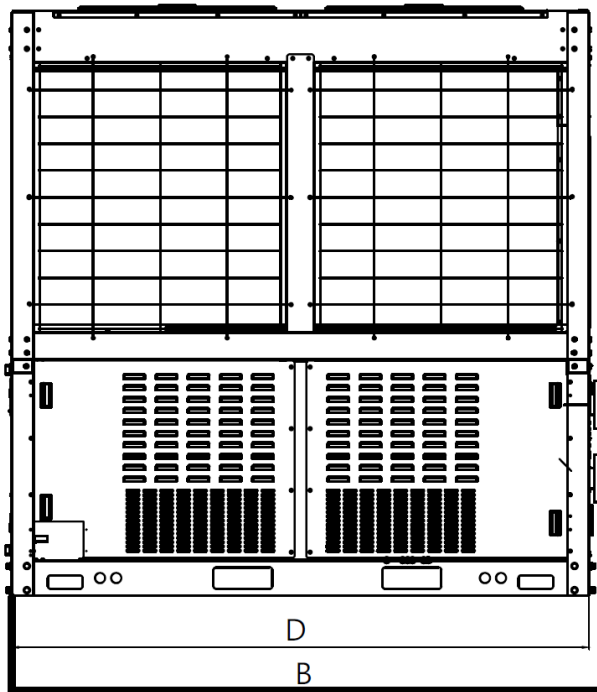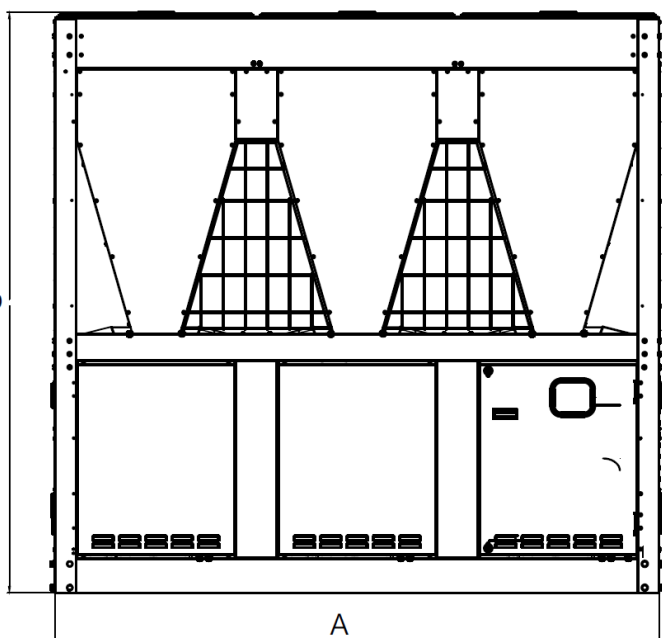

Classification	Dimension(in)
A	90-3/16
B	86-9/16
C	86-5/8
D	84-13/16
E	17-3/32
F	27-9/16
G	6-3/16