



Internal Use Only

<http://biz.lgservice.com>

Room Air Conditioner

SVC MANUAL(Exploded View)

**MODEL : AS-W183CRU1(LAN180HSV/LAU180HSV)
AS-W243CRU1(LAN240HSV/LAU240HSV)**

CAUTION

Before Servicing the unit, read the safety precautions in General SVC manual.
Only for authorized service personnel.

Product Specifications

Models		Unit	AS-W183CRU1	AS-W243CRU1
Cooling Capacity		kW	0.90~5.33~8.65	0.90 ~ 6.45 ~ 8.80
		Btu/h.	3,070~18,200~29,515	3,070~22,000~30,030
Heating Capacity		kW	0.90~6.45~11.40	0.90 ~ 8.09 ~ 11.40
		Btu/h.	3,070~22,000~38,898	3,070~27,600~38,898
Power Input	Cooling	W	1,447	2,040
Running Current	Cooling/Heating	A	6.3/8.2	7.9 / 10.7
Starting Current	Cooling/Heating	A	6.3/8.2	7.9 / 10.7
EER		W/W	3.69	3.16
		Btu/h.W	12.6	10.8
SEER			20.5	20.0
HSPF			9.7	10.0
Power Supply		Ø / V / Hz	1/208-230/60	1/208-230/60
Power Factor		%	98.2	98.2
Air Flow Rate	Indoor,Max	m³/min(CFM)	20.8(735)	20.8(735)
	Outdoor,Max	m³/min(CFM)	60(2,119)	60(2,119)
Moisture Removal		l/h.	2.6	2.6
Sound Level	Indoor,H/M/L	dB(A)±3	45/40/35/29	45/40/35/29
	Outdoor,Max	dB(A)±3	53	53
Refrigerant & Charge (at 7.5 m)		g(oz)	R410A, 1,800(63.5)	R410A, 1,800(63.5)
Additional Refrigerant charge		g/m(oz/ft)	35(0.38)	35(0.38)
Compressor	Type		Twin Rotary	Twin Rotary
	Model		GJT240DAA	GJT240DAA
	Motor Type		Brushless DC Motor	Brushless DC Motor
	Oil Type		PVE(FVD68C)	PVE(FVD68C)
	Oil Charge	cc	900	900
	O.L.P. name		-	-
Fan(Indoor)	Type		Cross Flow Fan	Cross Flow Fan
	Motor Output	W	76.1	76.1
Fan(Outdoor)	Type		Propeller	Propeller
	Motor Type		BLDC	BLDC
	Motor Output	W	124	124
Circuit Breaker*		A	25	25
Power Supply Cable		No.*mm²	3*2.5	3*2.5
Power and Transmission Cable No.*mm²		No.*mm²	4*0.75 (Including Earth)	4*0.75 (Including Earth)
Piping Connections	Liquid Side	mm(in)	9.52(3/8)	9.52(3/8)
	Gas Side	mm(in)	15.88(5/8)	15.88(5/8)
Drain Hose(O.D / I.D.)		mm(in)	21.5 /16.0 (0.85 / 0.63)	21.5 /16.0 (0.85 / 0.63)
Dimensions	Indoor (W*H*D)	mm	1,030*325*245	1,030*325*245
		inch	40.6*12.8*9.64	40.6*12.8*9.64
	Outdoor (W*H*D)	mm	870*800*320	870*800*320
		inch	34.3*31.5*12.6	34.3*31.5*12.6
Net Weight	Indoor	kg(lbs)	17(37.5)	17(37.5)
	Outdoor	kg(lbs)	60(132.3)	60(132.3)
Operation Range	Cooling(Outdoor)	°C	-10~48(14.0~118.4)	-10~48(14.0~118.4)
	Heating(Outdoor)	°C	-10~24(5~75.2)	-10~24(5~75.2)
Piping Length (Min/Max)		m(ft)	30(98.4)	30(98.4)
Chargeless		m(ft)	-	-
Max. Elevation Difference		m(ft)	15(49.2)	15(49.2)
Tool Code(Chassis)	Indoor + Outdoor		SC_A + UE1Plus	SC_A + UE1Plus
Functions	Temperature Control		O	O
	Plasma Filter		O	O
	Prefilter(washable/anti-fungus)		O	O
	Auto Clean		O	O
	Auto Swing		O	O
	Steps, Fan/Cool/Heat		5/6/6	5/6/6
	Airflow Direction Control(up&down)		Auto	Auto
	Airflow Direction Control(left&right)		Auto	Auto
	Remote Controller Type		Standard Wired Remocon, Wireless LCD(Better)	
	Setting Temperature	Cooling	18°C~30°C	18°C~30°C
	Range	Heating	16°C~30°C	16°C~30°C
	Auto Operation (Micom Control)		-	-
	Auto Changeover (Micom Control)		O	O
	Self Diagnosis		O	O
	Timer		24h On/Off	24h On/Off
	Sleep Operation		O	O
	Soft Dry Operation		O	O
	Restart Delay(minute)		3	3
	Device Control(Defrost)		O	O
	Hot Start		O	O
	Jet Cool, Jet Heat		O	O
	Low Ambient Operation		O	O
	Special Function		-	-
Network Functions	Dry Contact		O	O
	Network Solution(LGAP)		O	O
	PI485		O	O

Note:


O : Applied, - : No relation

* For circuit breaker rating, please conform to local standards wherever necessary.

* Some of functions are slightly different depending upon models.

* The specification may be subject to change without notice for purpose of improvement.

2. Piping Diagrams



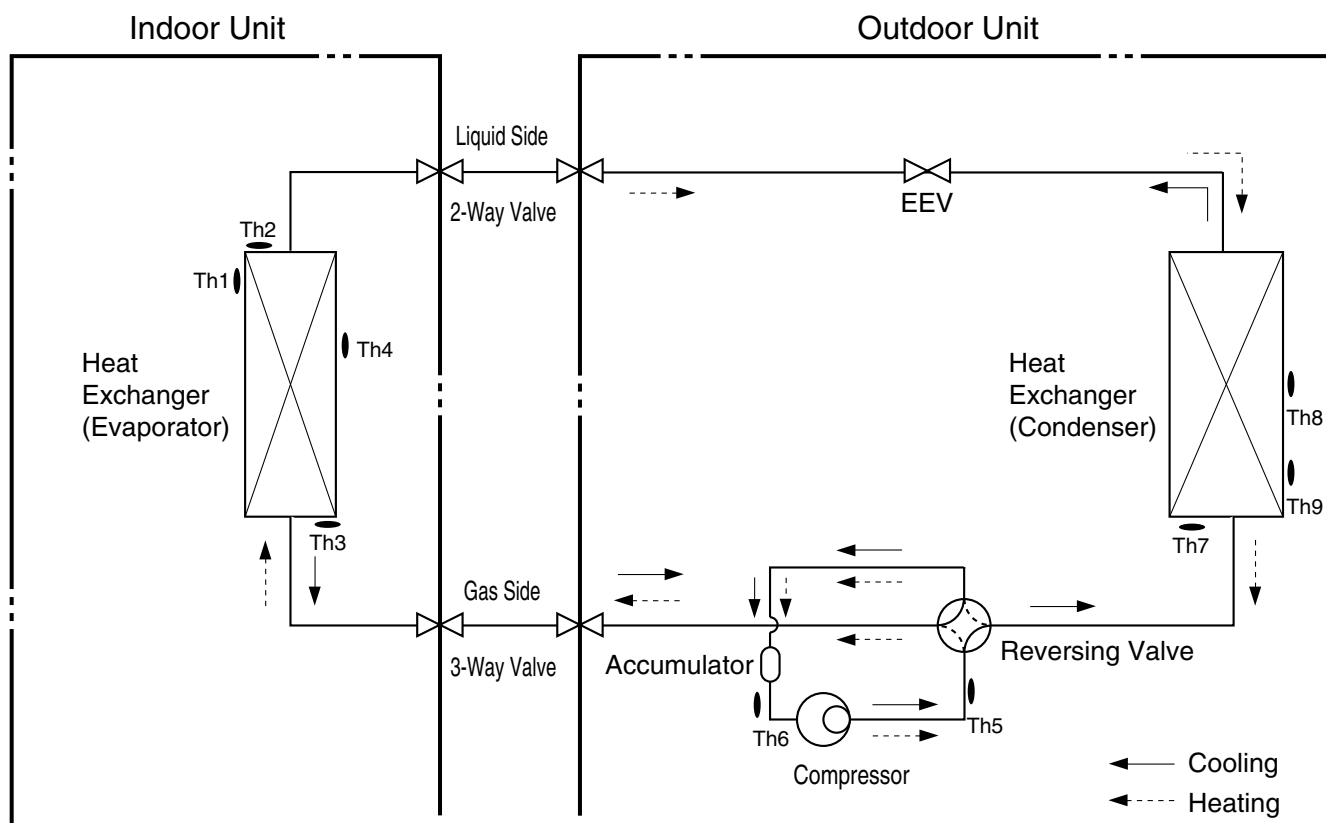


LOC.	Description	PCB Connector
Th1	Thermistor for suction air temperature	CN-TH1(Indoor)
Th2	Thermistor for evaporator inlet temperature	
Th3	Thermistor for evaporator outlet temperature	
Th4	Thermistor for evaporator middle temperature	CN-TH3(Indoor)
Th5	Thermistor for discharge pipe temperature	CN-TH3(OUTDOOR)
Th6	Thermistor for suction pipe temperature	
Th7	Thermistor for condensing temperature	CN-TH2(OUTDOOR)
Th8	Thermistor for outdoor air temperature	
Th9	Thermistor for condensing middle temperature	CN-TH4(OUTDOOR)

※ EEV : Electronic Expansion Valve



3. Wiring Diagrams

Indoor Unit

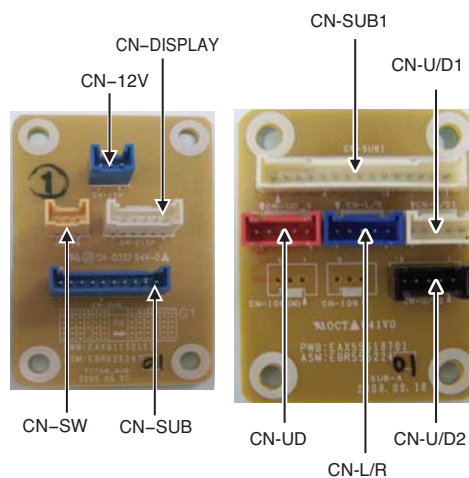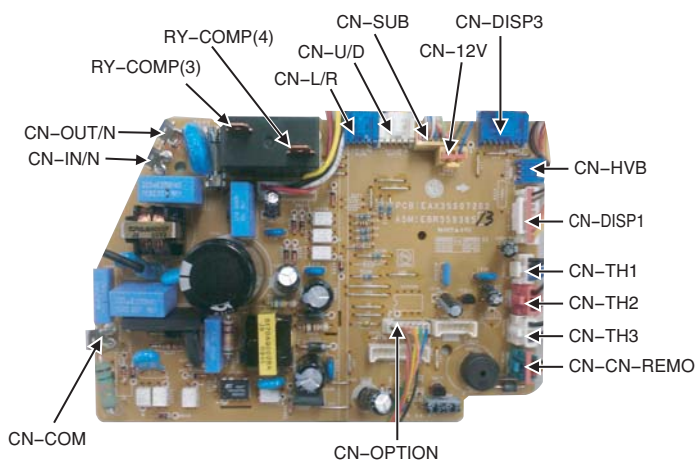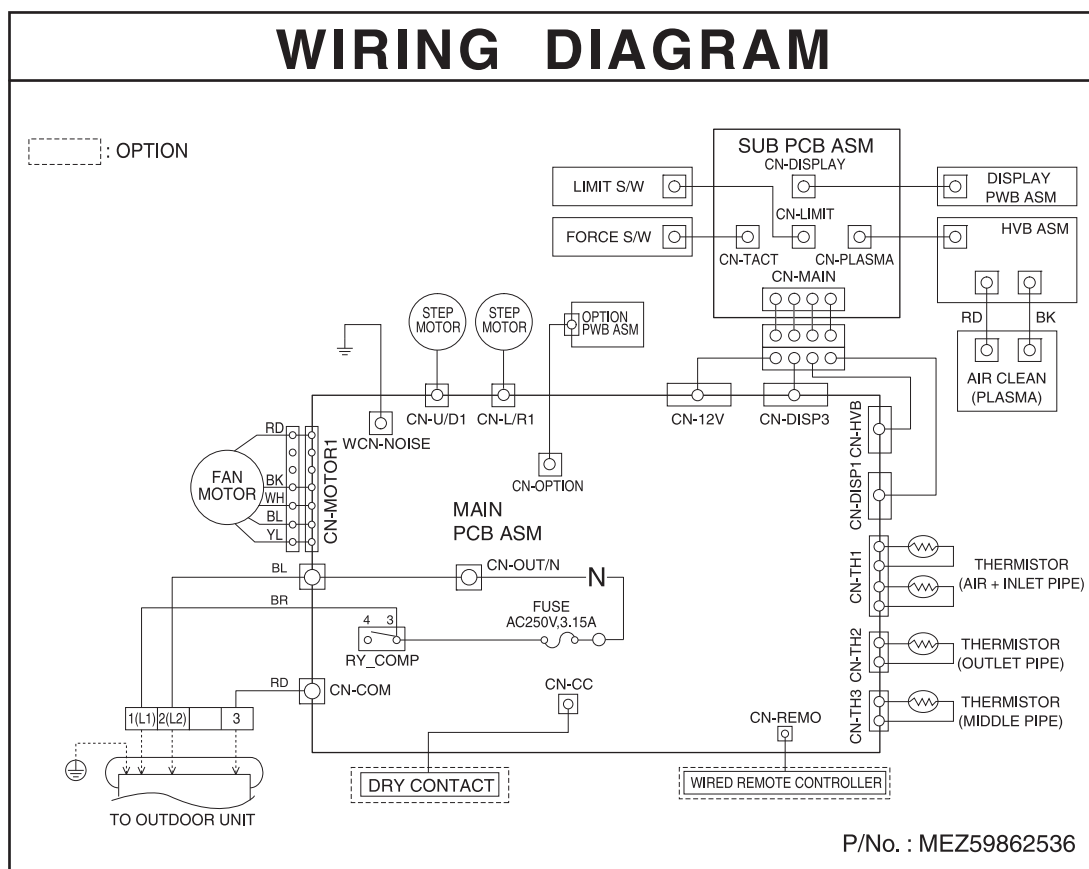


Outdoor Unit

• Model : ASUW183CRU1/ASUW243CRU1

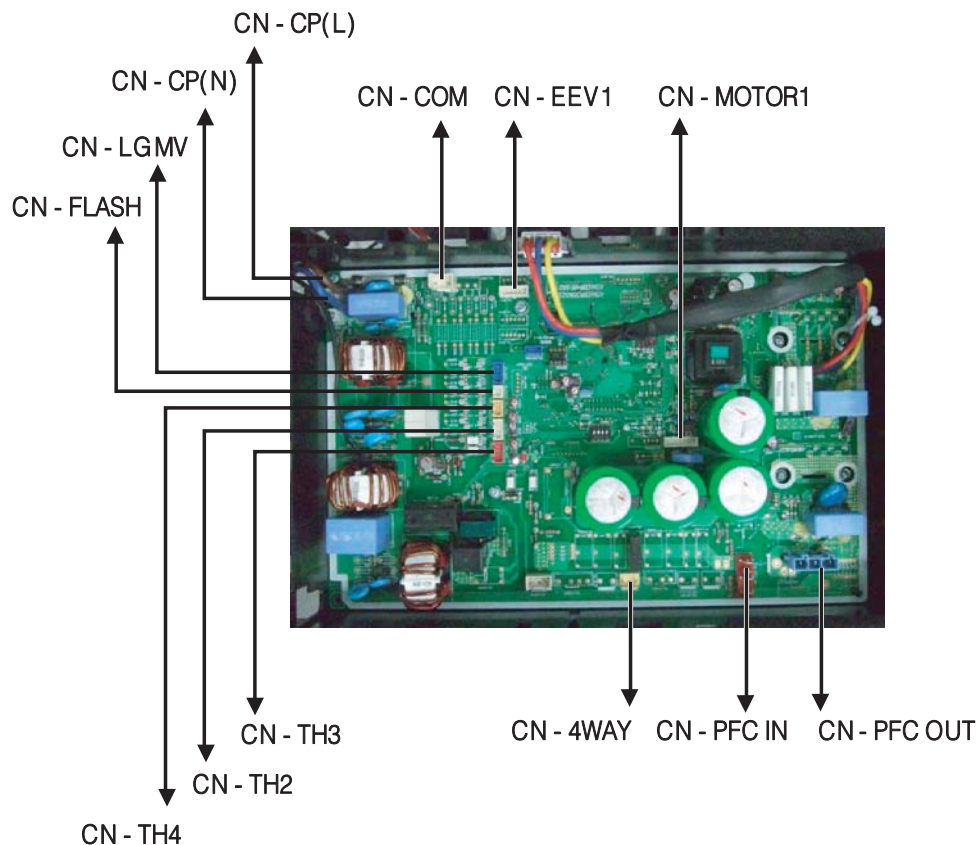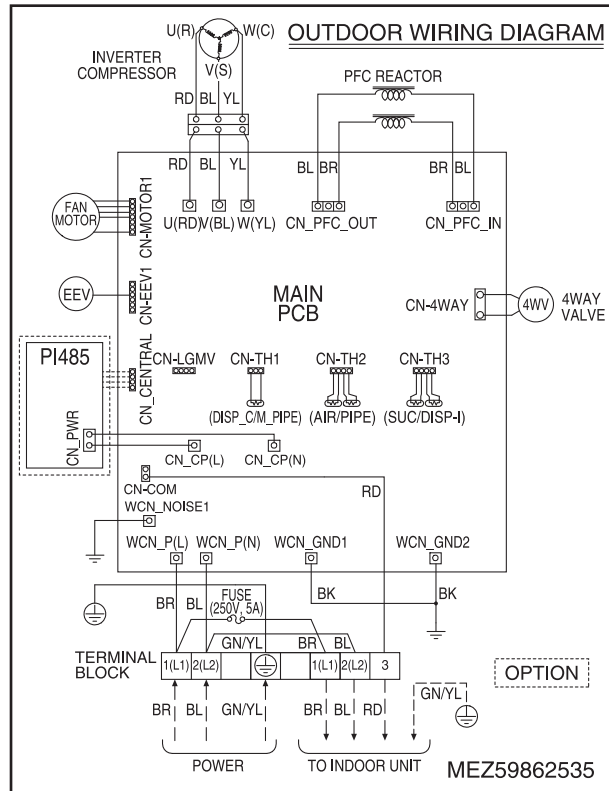


Exploded View

Indoor Unit

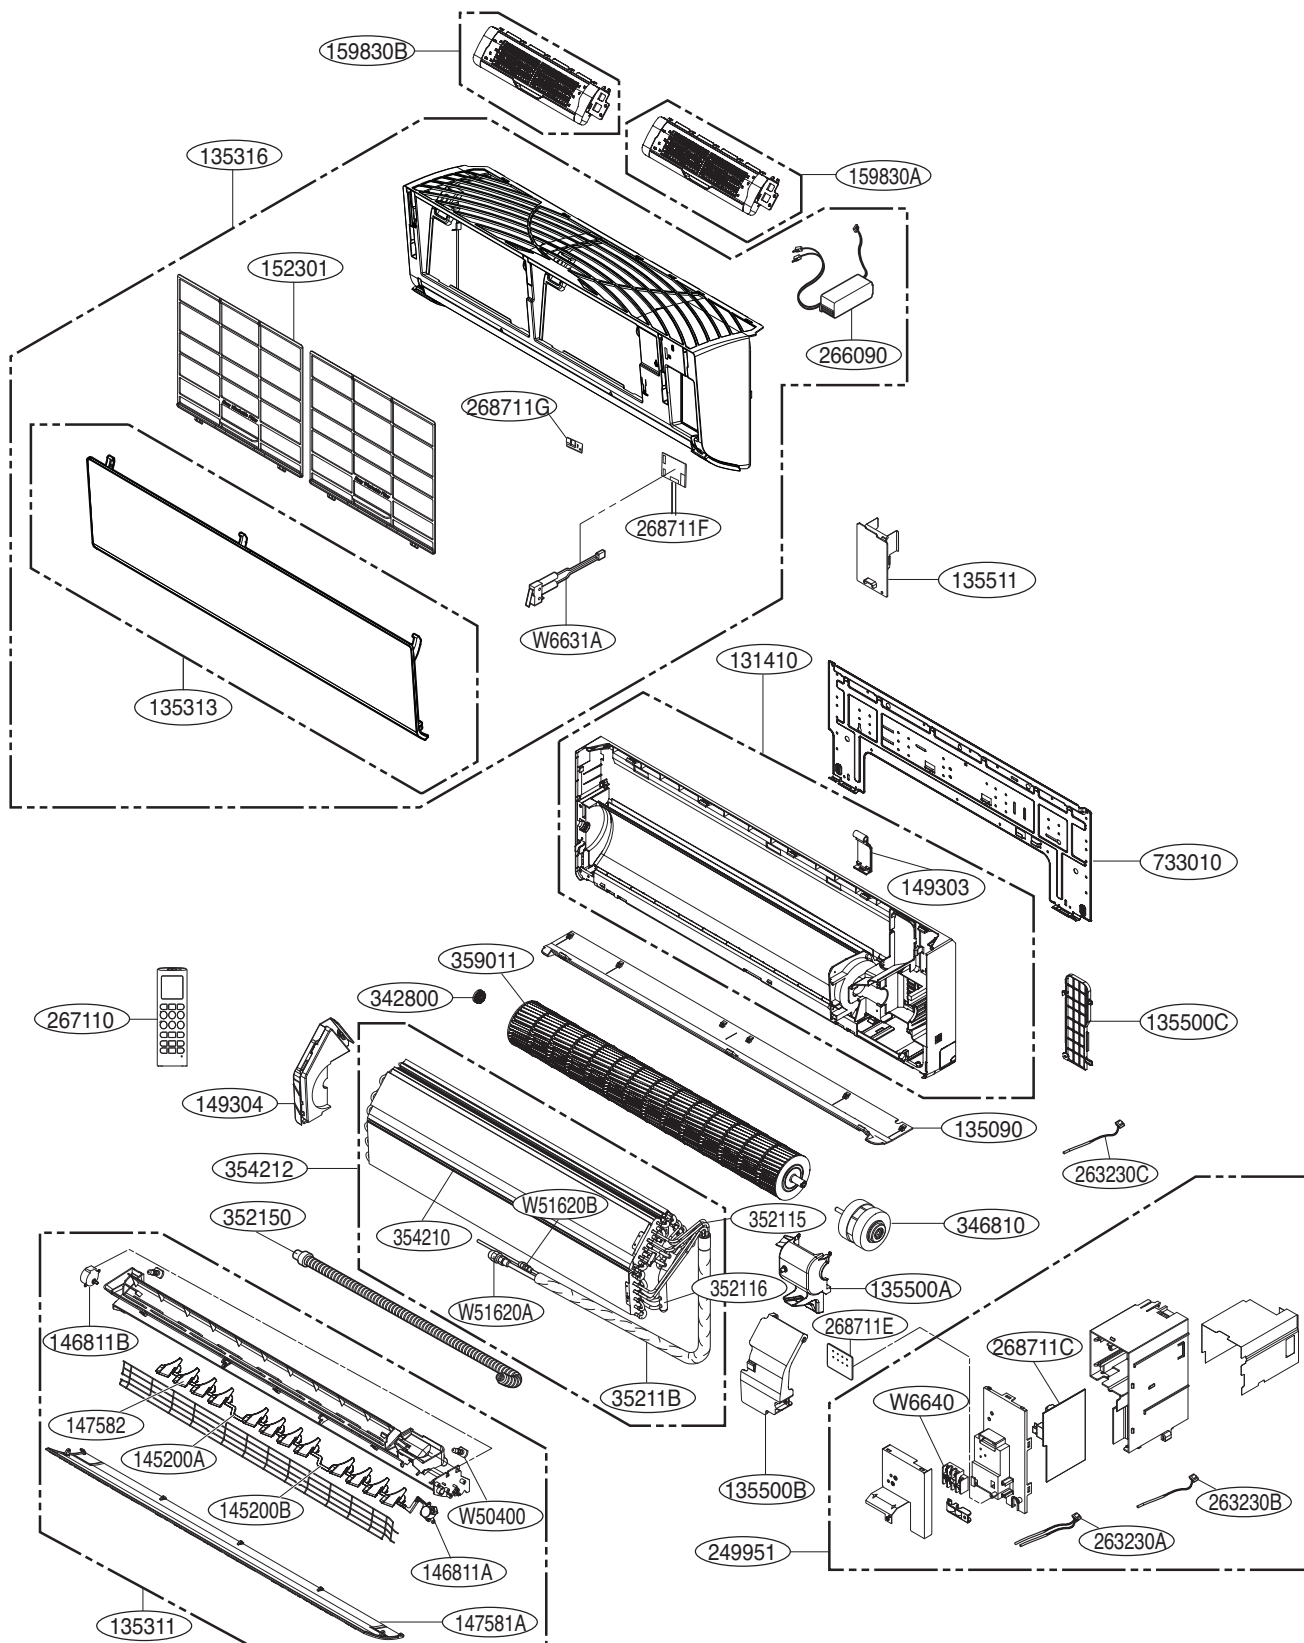

Outdoor Unit

• Model : ASUW183CRU1/ASUW243CRU1

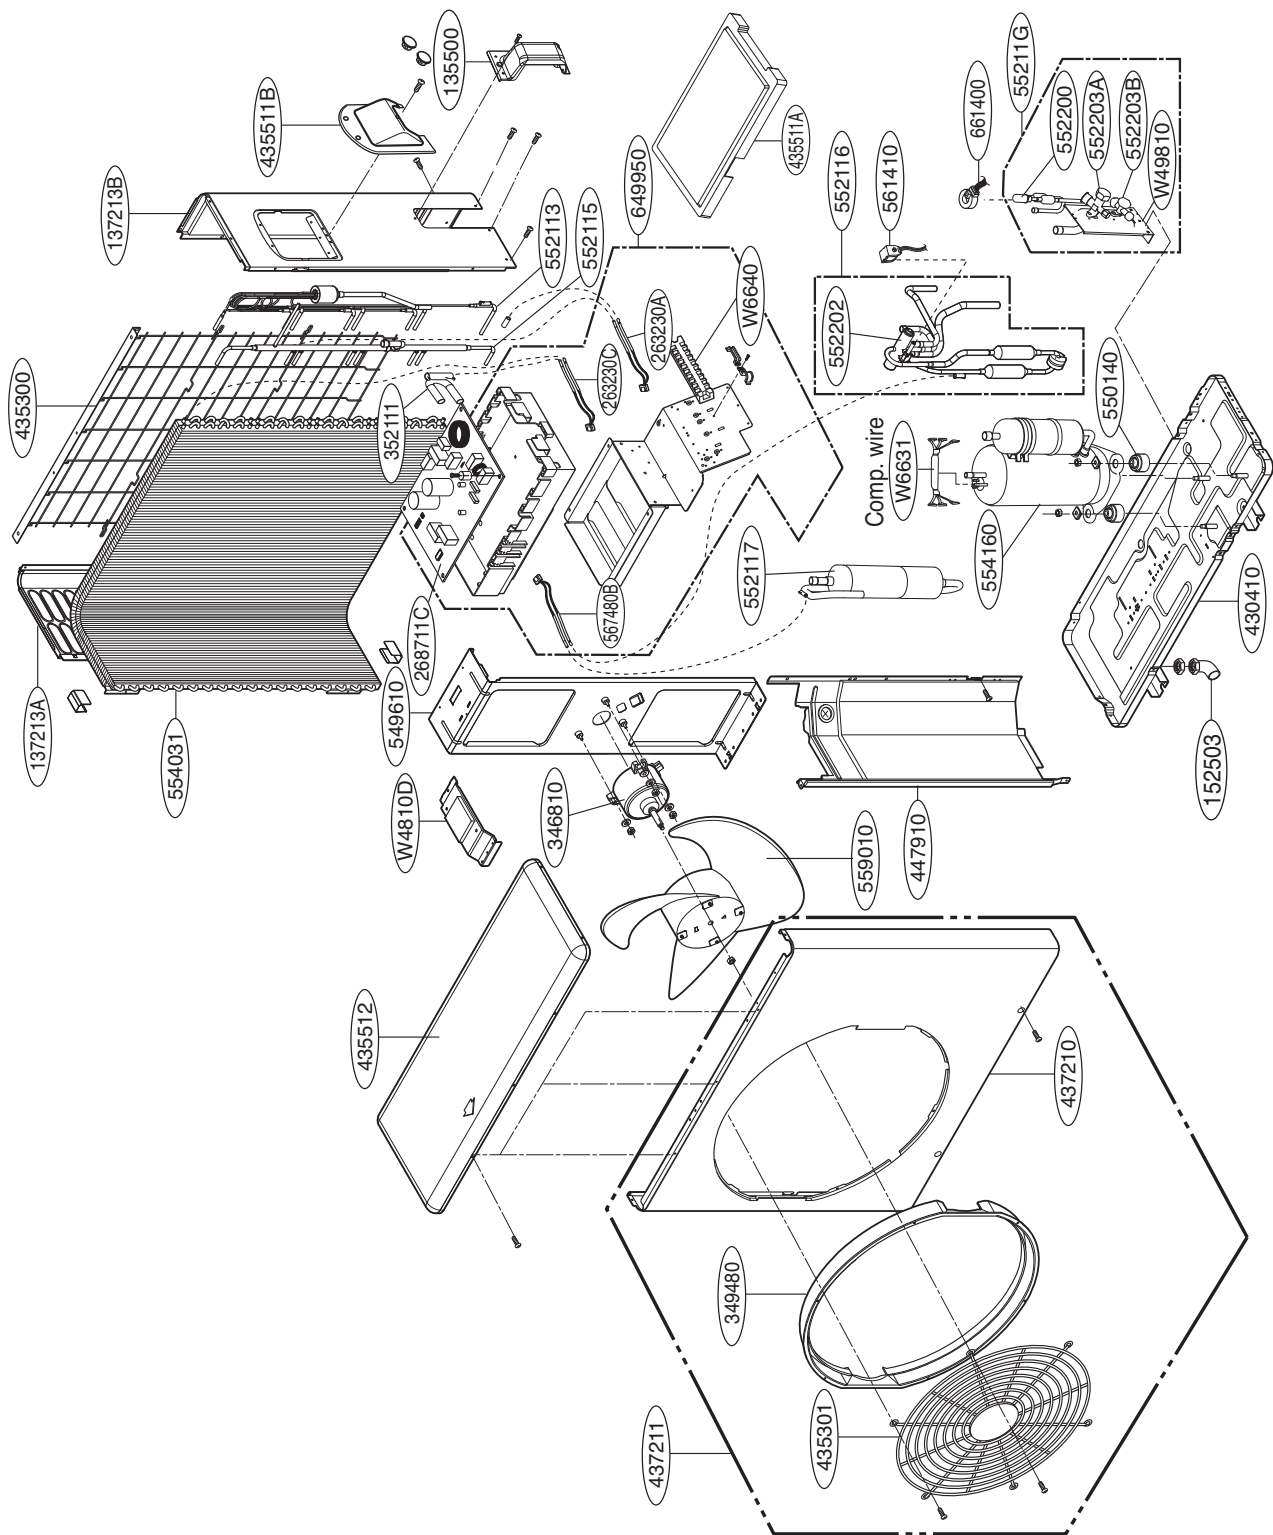



US	1. Please call the installing contractor of your product, as warranty service will be provided by them. 2. If you have service issues that have not been addressed by the contractor, please call 1-888-865-3026.
CANADA	Service call Number # : (888) LG Canada, (888) 542-2623

P/NO : MFL63741117

JANUARY, 2011