

Job Name/Location:

Tag #:

Date:

For: File Resubmit
 Approval Other _____

PO No.:

Architect: GC:

Engr: Mech:

Rep:

(Company) (Project Manager)

ARUB270BT2 (a) ARUB096BT2
Multi V™ Sync II (b) ARUB096BT2
22.5 Ton Outdoor Unit (c) ARUB076BT2



Performance:

Cooling Mode:

Capacity (Btu/h)	267,500
Capacity (tons)	22.5
Power Input (kW)	21.8

Heating Mode:

Capacity (Btu/h)	301,000
Power Input (kW)	24.6

Cooling Nominal Test Conditions:
 Indoor: 80°F DB /67°F WB
 Outdoor 95° DB
 :

Heating Nominal Test Conditions:
 Indoor: 70°F DB
 Outdoor 47°F DB /43°F WB
 :

Electrical:

	(a) ARUB096BT2	(b) ARUB096BT2	(c) ARUB076BT2
Power Supply (V/Hz/Ph)	208-230/60/3	208-230/60/3	208-230/60/3
MOP (A)	60	60	55
MCA (A)	42	42	38
Rated Amps (A)	37.1	37.1	33.1
Compressor A (A)	16.0	16.0	12.0
Compressor B (A)	18.7	18.7	18.7
Fan Motor (A)	2.4	2.4	2.4
Max Starting Current (A)	130.6	130.6	126.6

Piping:

	(a) ARUB096BT2	(b) ARUB096BT2	(c) ARUB076BT2
Refrigerant Charge (lbs)	17.6	17.6	17.6
Liquid Line (in, OD)	3/8 Flare	3/8 Flare	3/8 Flare
Vapor Line High (in, OD)	3/4 Braze	3/4 Braze	5/8 Braze
Vapor Line Low (in, OD)	7/8 Braze	7/8 Braze	3/4 Braze

Standard Features:

- Limited Warranty with LG Certified Installation
 - Two Year Functional Parts Warranty
 - Additional Four Year Compressor Warranty
- Black Box Function
- Night Quiet Operation
- Fault Detection and Diagnosis

Operating Range:

Cooling (°F DB)	23 - 110
Heating (°F WB)	-4 - 60
Synchronous (°F DB)	14 -81

Unit Data:

Refrigerant Type	R410A
Refrigerant Control	EEV
Max Num of Indoor Units ¹	45
Sound Pressure ² dB(A)	63
Net Unit Weight (a) + (b) + (c) (lbs)	628 + 628 + 628
Shipping Weight (a) + (b) + (c) (lbs)	664 + 664 + 664
Communication Cable (No. x AWG)	
Outdoor to Indoor ³	2 x 18
Outdoor to Outdoor ⁴	2 x 18
Heat Exchanger Coating	GoldFin™

Compressor:

Inverter Scroll Quantity	3
Constant Scroll Quantity	3
Oil / Type	PVE/FVC68D

Fan:

Type	Propeller
Quantity (a) + (b) + (c)	2 + 2 + 2
Motor/Drive	Brushless Digitally Controlled/Direct
Air Flow Rate (a) + (b) + (c) (CFM)	6,700 + 6,700 + 6,700

Notes:

- 1.The combination ratio must be between 50-130%.
- 2.Sound pressure levels are tested in an anechoic chamber under Korea Standard KSA0701 for the combination of outdoor units.
- 3.All communication cable to be minimum 18 AWG, 2-conductor, stranded, shielded and must comply with applicable local and national code. Cables terminate at each frame.
- 4.All communication cable to be minimum 18 AWG, 2-conductor, stranded and must comply with applicable local and national code. Cables terminate at each frame.
- 5.The data mentioned in the above tables is applied with non-ducted indoor units.
- 6.This data is rated 0 ft above sea level, with 25 ft of refrigerant line per indoor unit and a 0 ft level difference between outdoor and indoor units. All capacities are net with a combination ratio between 95 – 105%.
- 7.The voltage tolerance is ± 10%.
- 8.Power wiring cable size must comply with the applicable local and national code. Cables terminate at each frame.
- 9.Requires ARCNB20 and ARCNB30 connecting branch pipes to connect components.



Job Name/Location:

ARUB270BT2
 Multi V™ Sync II
 22.5 Ton Outdoor Unit


(a) ARUB096BT2
 (b) ARUB096BT2
 (c) ARUB076BT2



Tag #:

Date:

PO No.:

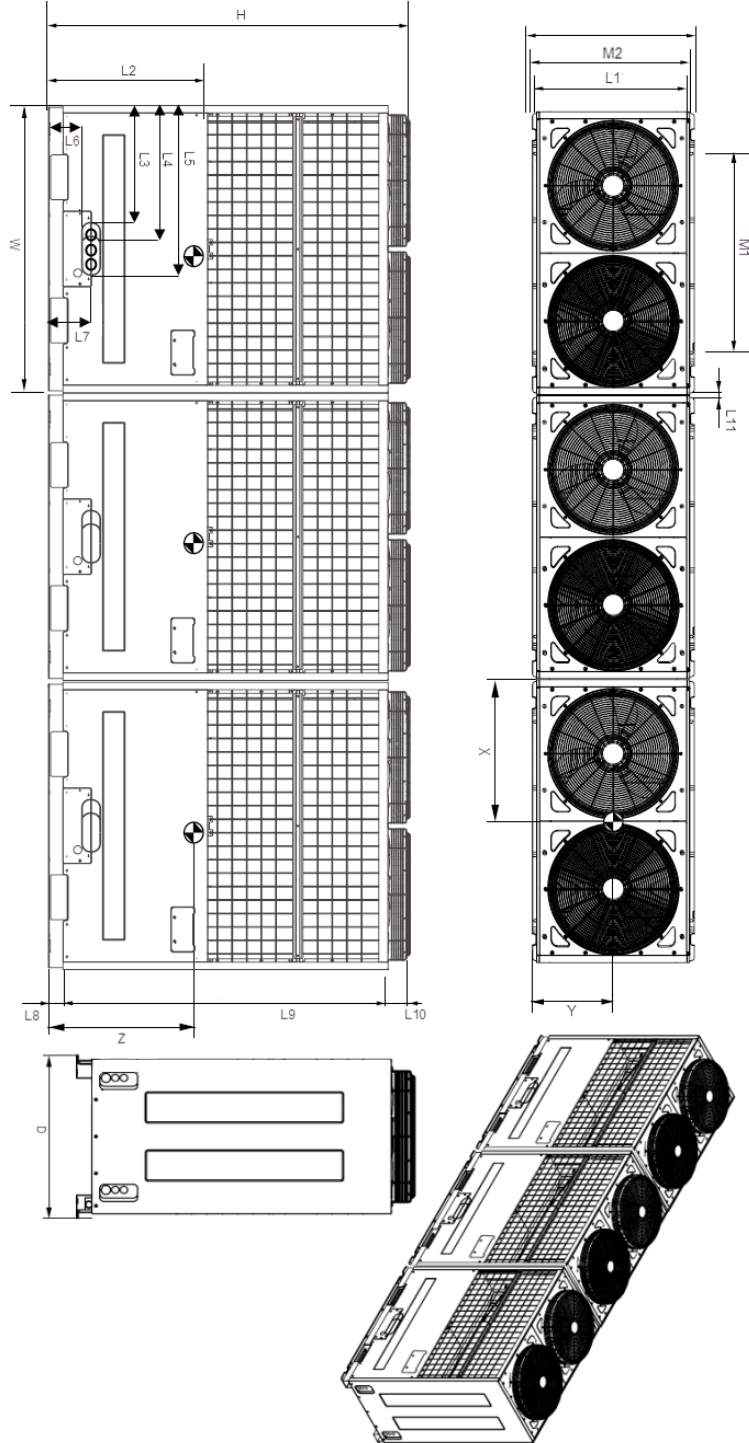

Center of Gravity

	(a) ARUB096BT2	(b) ARUB096BT2	(c) ARUB076BT2
X	21-3/4	21-3/4	21-3/4
Y	12	12	12
Z	21-5/16	21-5/16	21-5/16

= Center of Gravity

W	50-3/8
H	63-5/16
D	28-11/16
L1	27-3/8
L2	27-11/16
L3	20-5/8
L4	23
L5	29-7/8
L6	7-3/8
L7	5-7/8
L8	3-3/16
L9	56-1/8
L10	3-7/8
M1	35-7/16
M2	27-9/16

Note - All dimensions have a tolerance of ± 0.25 in.