

Job Name/Location:

Tag #:

Date:

For:  File  Resubmit  
 Approval  Other \_\_\_\_\_

PO No.:

Architect:

GC:

Engr:

Mech:

Rep:

(Company)

(Project Manager)

# Header Kits

## 4 Port





### Insulation Properties:

Material	Polyolefin Foam
UL94 Flame Classification	HF-1

### Fitting Properties:

Material	Copper
Design Pressure	551 PSIG

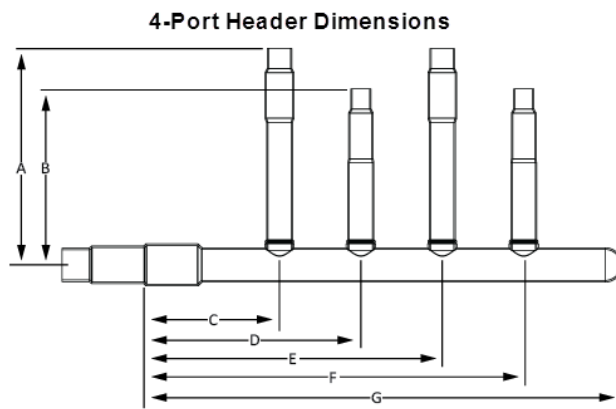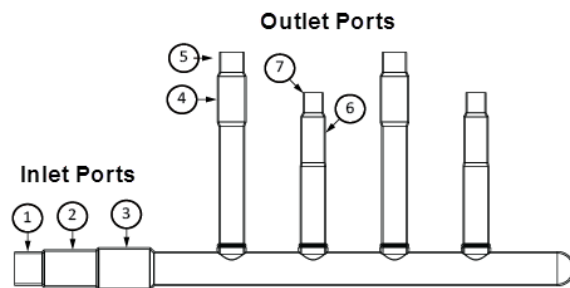

Not to scale

Model	Insulation for Header	
	Qty	
	Liquid	Vapor
ARBL054	1	1
ARBL104	1	1

Header Connection Diameters (in, ID)								
Model	Header Type	Port Identifier						
		1	2	3	4	5	6	7
ARBL054	Liquid	-	3/8	1/2	3/8	1/4	3/8	1/4
	Vapor	-	5/8	1/2	5/8	1/2	5/8	1/2
ARBL104	Liquid	-	3/8	1/2	5/8	3/4	1/2	5/8
	Vapor	7/8	1	1-1/8	3/4	5/8	5/8	1/2

Header Dimensions <sup>1</sup> (in)								
Model	Header Type	A	B	C	D	E	F	G
ARBL054	Liquid	5-29/32	4-23/32	4-23/32	7	9-15/32	11-27/32	14-5/32
	Vapor	5-29/32	4-23/32	4-23/32	7	9-15/32	11-27/32	14-5/32
ARBL104	Liquid	5-29/32	4-23/32	4-23/32	7	9-15/32	11-27/32	14-5/32
	Vapor	5-29/32	4-23/32	6-5/16	8-11/16	11-1/16	13-7/16	15-23/32

### Notes:

- 1.LG header fittings must be used. Field supplied header fittings are not permitted.
- 2.Kit components must be kept dry and free of debris before installation.
- 3.Must follow installation instructions in the applicable LG installation manual.