

Job Name/Location:

Tag #:

Date:

PO No.:

Architect:

Engr:

Rep:

(Company)

For: ☐ File

☐ Resubmit

☐ Approval ☐ Other _____

GC:


Mech:

(Project Manager)

ZLABKA02A

Low Ambient Baffle Kit for 8-12 Ton Outdoor Unit

Exclusively manufactured by:
Washington Metal Fabricators

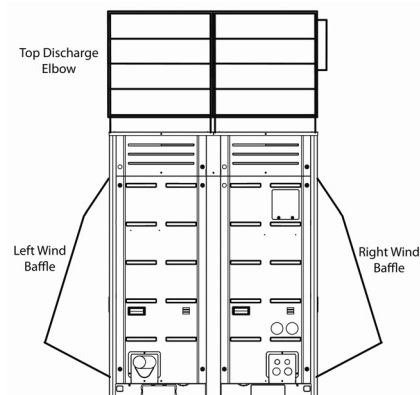

Compatible Outdoor Units:

ARUN096BT3/ARUB096BT3

ARUN121DT3/ARUB121DT3

ARUN121BT3/ARUB121BT3

ARUN144DT3/ARUB144DT3

ARUN144BT3/ARUB144BT3

ARUN096DT3/ARUB096DT3

Fitting Properties:

Color

Warm Gray

Material

20 GA Sheet Metal

Notes:

1.Low Ambient Kits can only be used with single and dual frame units.

Each kit comes with:


- Right wind baffle
- Left wind baffle
- Rear wind baffle
- Top discharge elbow with motorized damper and 24 volt damper actuator
- (50) #10 x 1/2" self drilling hex head screws
- Sealtite connector (for routing of actuator control and power wiring down to outdoor unit electrical box)

Standard Features:


- Allows operation down to -4°F in cooling mode and 14°F in synchronous mode
- Damper operator has spring return, normally open actuator

Required Accessories (sold separately):



- ☐ Control kit- PRVC1



Left Wind Baffle



Right Wind Baffle

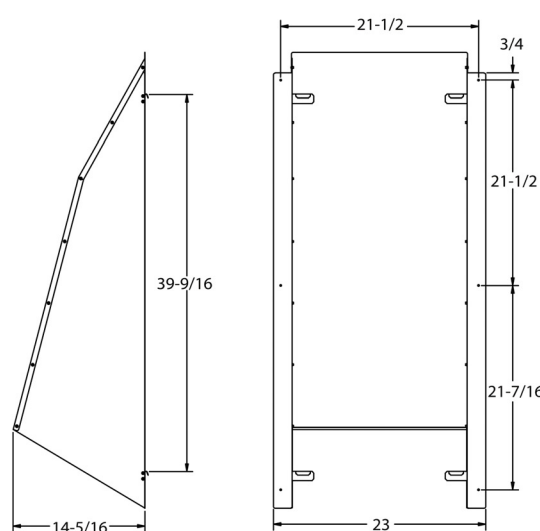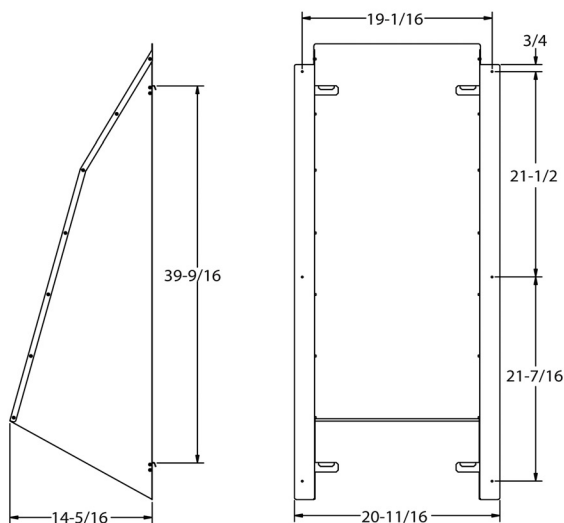

Job Name/Location:

ZLABKA02A


Low Ambient Baffle Kit for 8-12 Ton Outdoor Unit





Tag #:

Date:





PO No.:



Rear Wind Baffle

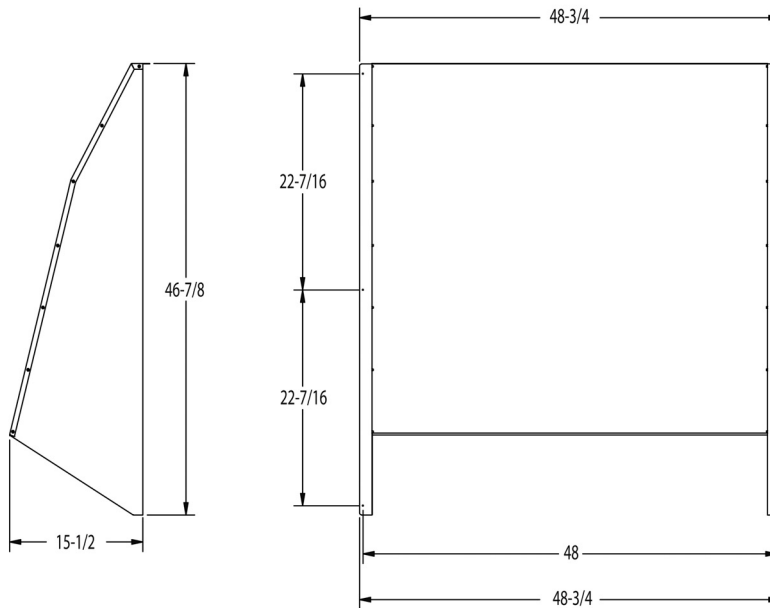

Right Top Discharge Elbow

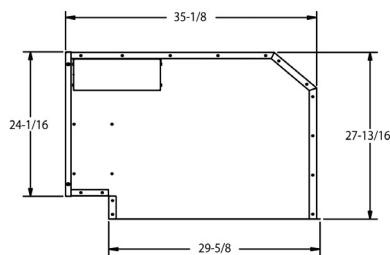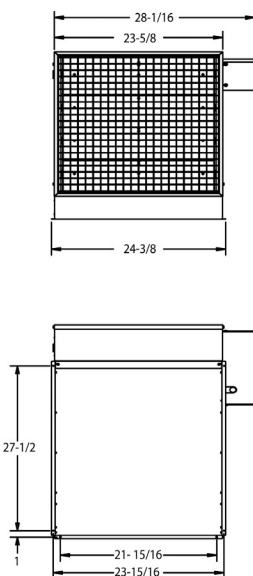

Left Top Discharge Elbow

