

Job Name/Location:

Tag #:

Date: _____ For: File Resubmit
 PO No.: _____ Approval Other _____
 Architect: _____ GC: _____
 Engr: _____ Mech: _____
 Rep: _____
 (Company) _____ (Project Manager) _____



ARUN408BTE4 (a) ARUN121BTE4
 Multi V™ IV Heat Pump (b) ARUN145BTE4¹
 34.0 Ton Outdoor Unit (c) ARUN145BTE4¹



Performance:

Cooling Mode:

Nominal Capacity (Btu/h)	408,000
Power Input ² (kW)	27.38

Heating Mode:

Nominal Capacity (Btu/h)	459,000
Power Input ² (kW)	26.43

Nominal Capacity is outside the scope of AHRI Standard 1230 and based on the following conditions:
 Indoor: 80°F DB / 67°F WB Indoor: 70°F DB
 Outdoor 95°F DB Outdoor 47°F DB / 43°F WB

Electrical: (a) ARUN121BTE4 (b) ARUN145BTE4¹ (c) ARUN145BTE4¹

	(a) ARUN121BTE4	(b) ARUN145BTE4 ¹	(c) ARUN145BTE4 ¹
Power Supply (V/Hz/Ø)	208-230/60/3	208-230/60/3	208-230/60/3
MOP (A)	60	80	80
MCA (A)	40.3	57.0	57.0
Rated Amps (A)	33.4	50.2	50.2
Compressor A (A)	27.4	27.2	27.2
Compressor B (A)	—	17.0	17.0
Fan (A)	6.0	6.0	6.0

Piping: (a) ARUN121BTE4 (b) ARUN145BTE4¹ (c) ARUN145BTE4¹

	(a) ARUN121BTE4	(b) ARUN145BTE4 ¹	(c) ARUN145BTE4 ¹
Refrigerant Charge (lbs)	23.6	23.6	23.6
Liquid Line ³ (in, OD)	1/2	5/8	5/8
Vapor Line ³ (in, OD)	1-1/8	1-1/8	1-1/8

Standard Features:

- HiPOR (high pressure oil return)
- Smart Oil Control
- Capable of Split Frame Defrost
- Night Quiet Operation
- Fault Detection and Diagnosis

Required Accessories:

- ARCNN21 (frame connector Y-branch)
- ARCNN31 (frame connector Y-branch)

Optional Accessories:

- Air Guide - PRAGX3S0 (6 required)
 - Hail Guard Kit - ZHGDKA04A (3 required)
 - Low Ambient Kit - ZLABKA03A (3 required), Control Kit - PRVC2 (1 per system)
- **(-9.9°F achieved only when all IDU's are operating in cooling mode.)**

Operating Range:

Cooling (°F DB)**	14-122
Heating (°F WB)	-13 - 61

Unit Data:

Refrigerant Type	R410A
Refrigerant Control	EEV
Max Number of Indoor Units ⁴	64
Sound Pressure ⁵ dB(A)	64.1
Net Unit Weight (a) + (b) + (c) (lbs)	540 + 672 + 672
Shipping Weight (a) + (b) + (c) (lbs)	573 + 705 + 705
Communication Cable ⁶ (No x AWG)	2 x 18
Heat Exchanger Coating	GoldFin™

Compressor:

Compressor Type	High Side Shell (HSS) DC Scroll
Compressor Quantity	5
Oil/Type	PVE/FVC68D

Fan:

Type	Propeller
Quantity (a) + (b) + (c)	6
Motor/Drive	Brushless Digitally Controlled/Direct
Air Flow Rate (a) + (b) + (c) (CFM)	30,250

Notes:

- 1.ARUN14BTE4/ARUN145DTE4 frames are ONLY for use in large capacity triple frame combinations. They cannot be used as standalone models or in a dual frame combination. These frames ARE NOT interchangeable with ARUN144BTE4/ARUN144DTE4 single frame models.
- 2.For AHRI ratings, refer to the AHRI website <http://www.ahridirectory.org>.
- 3.For main pipe segment size, refer to the LATS Multi V tree diagram.
- 4.The combination ratio must be between 50-130%.
- 5.Sound Pressure levels are tested in an anechoic chamber under ISO Standard 3745 for the combination of outdoor units.
- 6.All communication cable to be minimum 18 AWG, 2-conductor, stranded, shielded and must comply with applicable local and national code. Cables terminate at each frame.
- 7.Nominal data is rated 0 ft above sea level, with 25 ft of refrigerant line per indoor unit and a 0 ft level difference between outdoor and indoor units. All capacities are net with a combination ratio between 95-105%.
- 8.Power wiring cable size must comply with the applicable local and national code. Cables
- 9.The voltage tolerance is ± 10%.



ARUN408BTE4
 Multi V™ IV Heat Pump
 34.0 Ton Outdoor Unit


(a) ARUN121BTE4
 (b) ARUN145BTE4¹
 (c) ARUN145BTE4¹



Tag #:

Date:

PO No.:

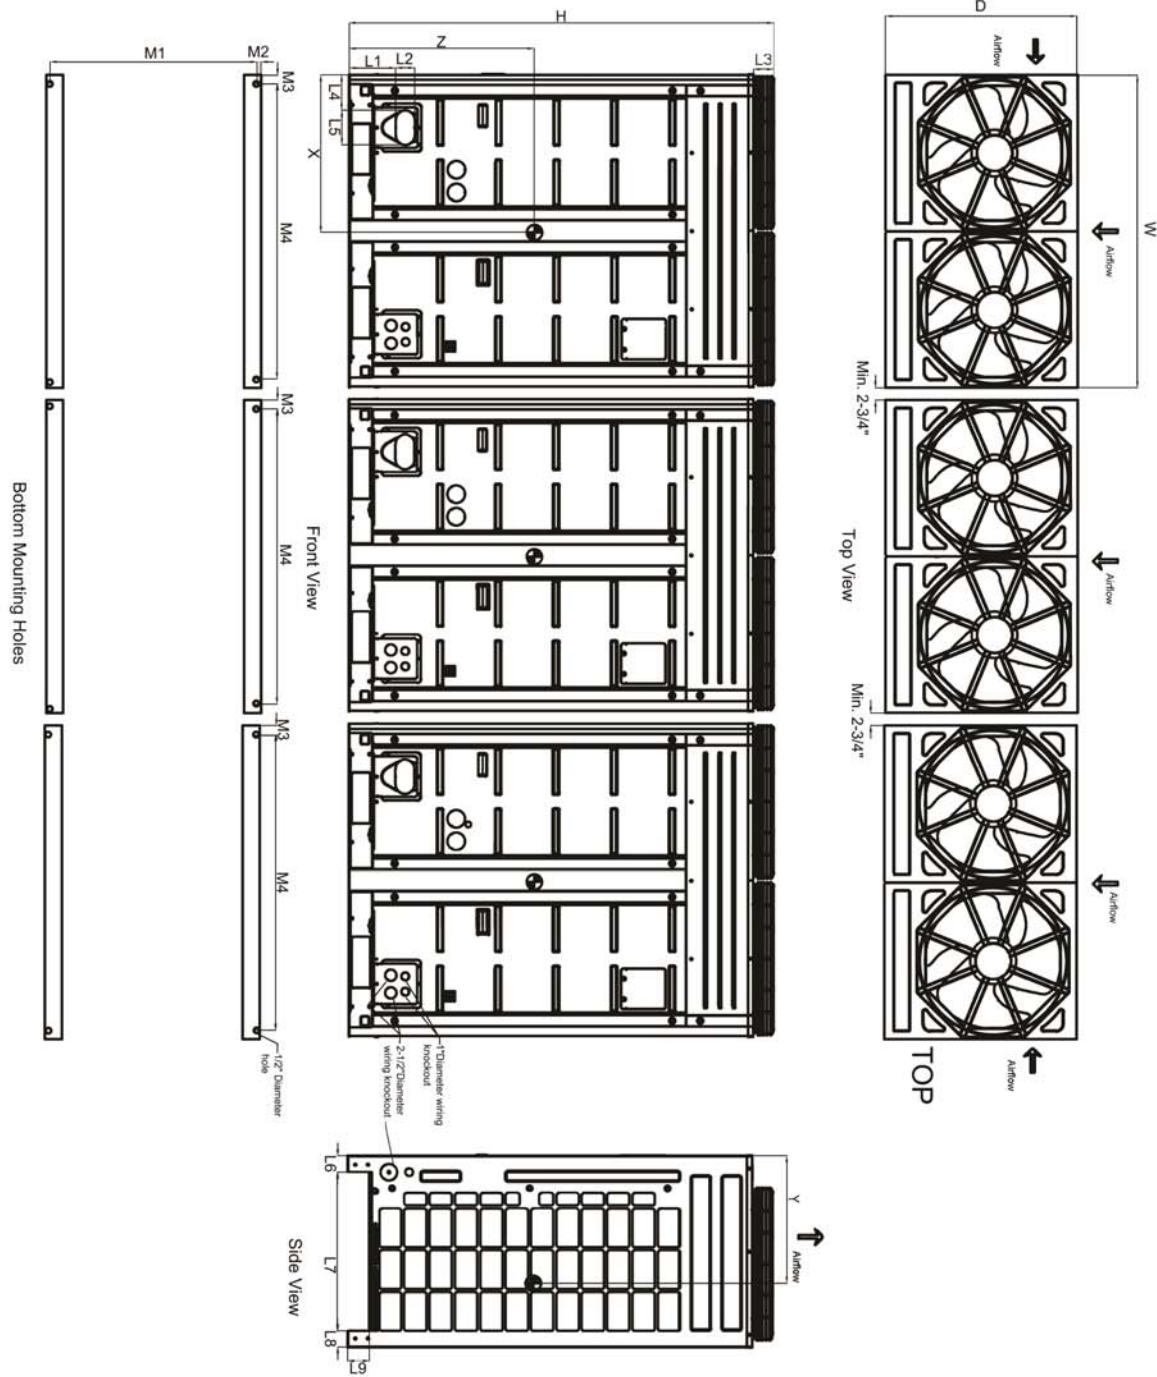

W	48-13/16"
D	29-15/16"
H	66-1/8"
L1	7-1/4"
L2	2-15/16"
L3	3-1/8"
L4	5-1/2"
L5	5-3/8"
L6	2-9/16"
L7	24-3/16"
L8	2-9/16"
L9	3-5/16"
M1	29-1/16"
M2	7/16"
M3	2-5/8"
M4	43-3/8"

Center of Gravity

X	24-3/4"
Y	21-9/16"
Z	29-7/8"

Note - All dimensions have a tolerance of ± 0.25 in.
 = Center of Gravity