

Date:

For:  File  Resubmit

PO No.:

Approval  Other

Architect:

GC:

Engr:

Mech:

Rep:

(Company)

(Project Manager)



**ARUB384BTE4** (a) ARUB096BTE4  
**Multi V™ IV Heat Recovery** (b) ARUB145BTE4<sup>1</sup>  
**32.0 Ton Outdoor Unit** (c) ARUB145BTE4<sup>1</sup>

**Performance:**

Cooling Mode:

Nominal Capacity (Btu/h)	384,000
Power Input <sup>2</sup> (kW)	25.16

Heating Mode:

Nominal Capacity (Btu/h)	432,000
Power Input <sup>2</sup> (kW)	25.23

Nominal Capacity is outside the scope of AHRI Standard 1230 and based on the following conditions:

Indoor: 80°F DB / 67°F WB      Indoor: 70°F DB  
 Outdoor: 95°F DB                  Outdoor: 47°F DB / 43°F WB

**Electrical:** (a) ARUB096BTE4 (b) ARUB145BTE4 (c) ARUB145BTE4<sup>1</sup>

Power Supply (V/Hz/Ø)	208-230/60/3	208-230/60/3	208-230/60/3
MOP (A)	60	80	80
MCA (A)	40.1	57.0	57.0
Rated Amps (A)	33.3	50.2	50.2
Compressor A (A)	27.3	27.2	27.2
Compressor B (A)	—	17.0	17.0
Fan (A)	6.0	6.0	6.0

**Piping:** (a) ARUB096BTE4 (b) ARUB145BTE4 (c) ARUB145BTE4<sup>1</sup>

Refrigerant Charge (lbs)	23.6	23.6	23.6
Liquid Line <sup>3</sup> (in, OD)	3/8	5/8	5/8
Vapor Line High <sup>3</sup> (in, OD)	3/4	7/8	7/8
Vapor Line Low <sup>3</sup> (in, OD)	7/8	1-1/8	1-1/8

**Standard Features:**

- HiPOR (high pressure oil return)
- Smart Oil Control
- Capable of Split Frame Defrost
- Night Quiet Operation
- Fault Detection and Diagnosis

**Required Accessories:**

- ARCNB21 (frame connector Y-branch)
- ARCNB31 (frame connector Y-branch)

**Optional Accessories:**

- Air Guide (8-12 ton outdoor units) - PRAGX3S0 (6 required)
- Hail Guard Kit - ZHGDKA04A (3 required)
- Low Ambient Baffle Kit - ZLABKA03A (3 required), Control Kit - PRVC2 (1 per system)

**\*\*(-9.9°F achieved only when all IDU's are operating in cooling mode. Does not impact synchronous operating range.)**

**Operating Range:**

Cooling (°F DB)**	14 – 122
Heating (°F WB)	-13 – 61
Synchronous	
Cooling Based (°F DB)	14 – 81
Heating Based (°F WB)	14 – 61

**Unit Data:**

Refrigerant Type	R410A
Refrigerant Control	EEV
Max Number of Indoor Units <sup>4</sup>	61
Sound Pressure <sup>5</sup> dB(A)	64.1
Net Unit Weight (a) + (b) + (c) (lbs)	540 + 672 + 672
Shipping Weight (a) + (b) + (c) (lbs)	573 + 705 + 705
Communication Cable <sup>6</sup> (No x AWG)	2 x 18
Heat Exchanger Coating	GoldFin™

**Compressor:**

Compressor Type	High Side Shell (HSS) DC Scroll
Compressor Quantity	5
Oil/Type	PVE/FVC68D

**Fan:**

Type	Propeller
Quantity (a) + (b) + (c)	6
Motor/Drive	Brushless Digitally Controlled/Direct
Air Flow Rate (a) + (b) + (c) (CFM)	30,250

**Notes:**

1. ARUB145BTE4/ARUB145DTE4 frames are ONLY for use in large capacity triple frame combinations. They cannot be used as standalone models or in a dual frame combination. These frames ARE NOT interchangeable with ARUB144BTE4/ARUB144DTE4 single frame models.
2. For AHRI ratings, refer to the AHRI website <http://www.ahridirectory.org>.
3. For main pipe segment size, refer to the LATS Multi V tree diagram.
4. The combination ratio must be between 50-130%.
5. Sound Pressure levels are tested in an anechoic chamber under ISO Standard 3745 for the combination of outdoor units.
6. All communication cable to be minimum 18 AWG, 2-conductor, stranded, shielded and must comply with applicable local and national code. Cables terminate at each frame.
7. Nominal data is rated 0 ft above sea level, with 25 ft of refrigerant line per indoor unit and a 0 ft level difference between outdoor and indoor units. All capacities are net with a combination ratio between 95-105%.
8. Power wiring cable size must comply with the applicable local and national code. Cables terminate at each frame.
9. The voltage tolerance is ± 10%.



**ARUB384BTE4**  
 Multi V™ IV Heat Recovery  
 32.0 Ton Outdoor Unit


(a) ARUB096BTE4  
 (b) ARUB145BTE4<sup>1</sup>  
 (c) ARUB145BTE4<sup>1</sup>



Tag #:

Date:

PO No.:

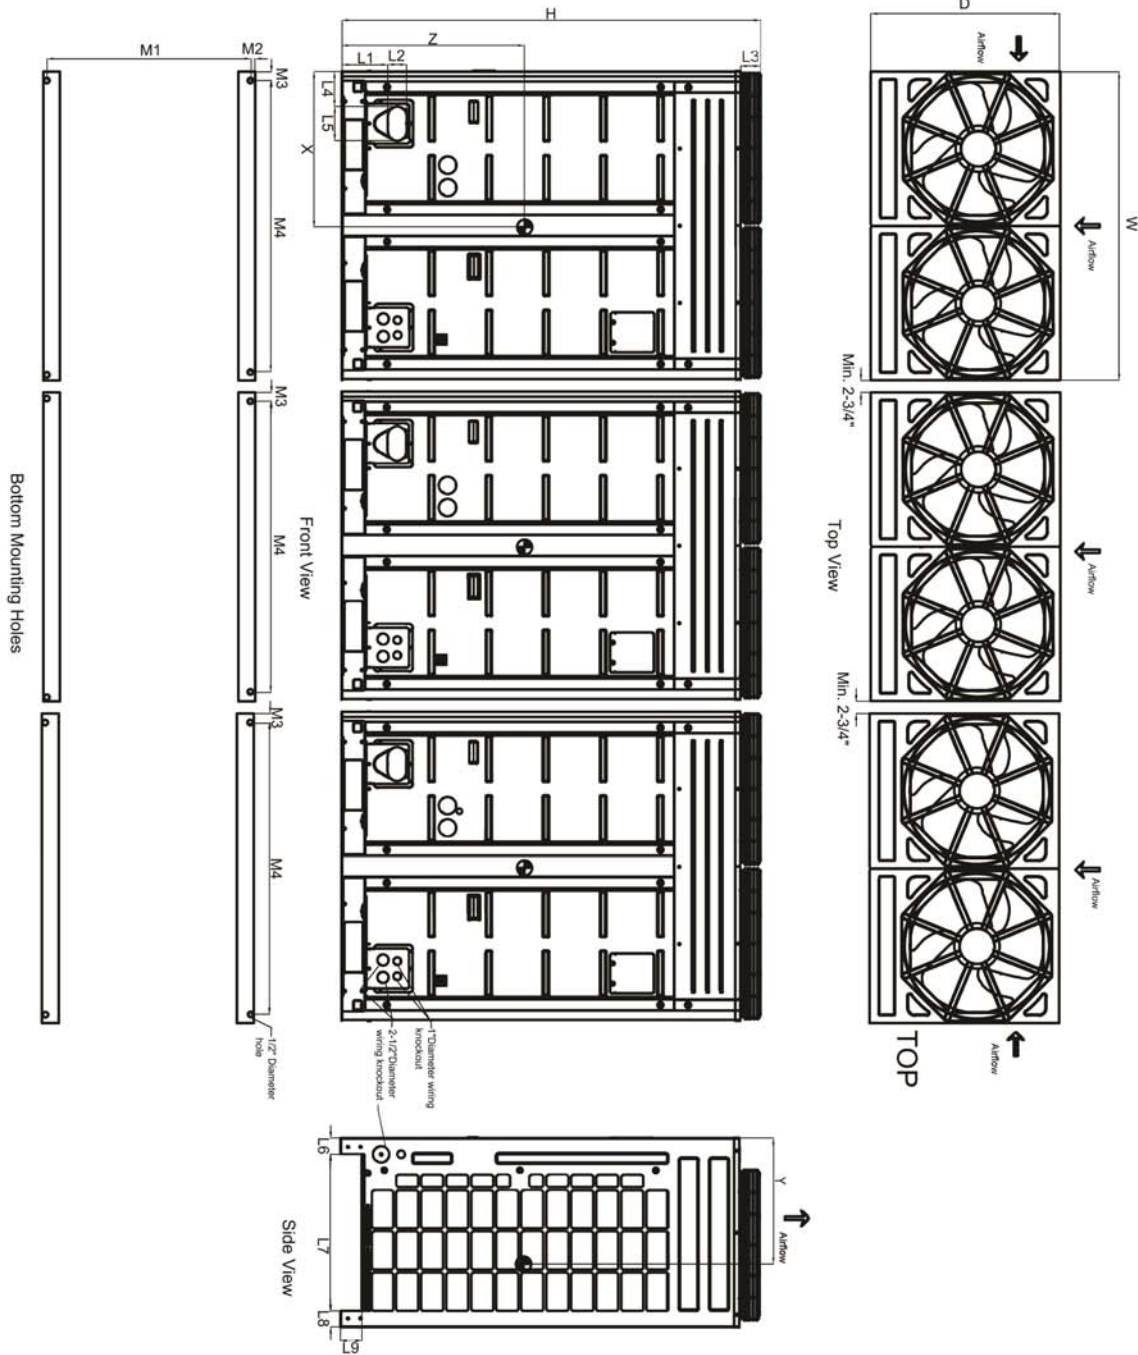

Bottom Mounting Holes

W	48-13/16"
D	29-15/16"
H	66-1/8"
L1	7-1/4"
L2	2-15/16"
L3	3-1/8"
L4	5-1/2"
L5	5-3/8"
L6	2-9/16"
L7	24-3/16"
L8	2-9/16"
L9	3-5/16"
M1	29-1/16"
M2	7/16"
M3	2-5/8"
M4	43-3/8"

<b>Center of Gravity</b>	
X	24-3/4"
Y	21-9/16"
Z	29-7/8"

Note - All dimensions have a tolerance of ± 0.25 in.  
 = Center of Gravity