

Job Name/Location:

Tag #:

Date:

For: File Resubmit

PO No.:

Approval Other

Architect:

GC:

Engr:

Mech:

Rep:

(Company)

(Project Manager)

LA120HSV5**Single Zone Art Cool™ Mirror Wall Mount**

Outdoor Unit (ODU) - LSU120HSV5, Indoor Unit (IDU) - LAN120HSV5

Performance:**Cooling:**

Cooling Capacity (Min~Rated~Max) (Btu/h)	1,023 ~ 12,000 ~ 13,785
SEER2	22.0
EER2	12.5

SEER - Seasonal Energy Efficiency Ratio

EER - Energy Efficiency Ratio

Heating:

Heating Capacity (Min~Rated~Max) (Btu/h)	1,023 ~ 13,600 ~ 22,178
HSPF2	10.0
Max. Heating @ Indoor 70°F DB	
Outdoor 17°F WB	13,810 (102%)
Outdoor 5°F WB*	11,930 (88%)
Outdoor -4°F WB	10,360 (76%)

HSPF - Heating Seasonal Performance Factor

*The Capacities at 5°F doesn't refer to H42 testing conditions

Cooling Nominal Test Conditions:

Indoor: 80°F DB / 67°F WB

Outdoor: 95°F DB / 75°F WB

Heating Nominal Test Conditions:

Indoor: 70°F DB / 60°F WB

Outdoor: 47°F DB / 43°F WB

Outdoor Unit:

MOP (A)	15
MCA (A)	10
Cooling / Heating Rated Amps (A)	7.4 / 7.4
Compressor (A)	7
Fan Motor (A)	0.4

MOP - Maximum Overcurrent Protection

MCA - Minimum Circuit Ampacity

Total Power Input:

Cooling Power Input (kW)	0.96
Heating Power Input (kW)	1.04

Piping:

Liquid Line (in., O.D.)	ø1/4
Vapor Line (in., O.D.)	ø3/8
Additional Refrigerant (oz./ft.)	0.22
Min. / Max. Pipe Length (ft.) ²	9.8 / 82
Piping Length (no add'l refig., ft.)	41
Max. Elevation (ft.)	49.2

Controls Features:

- 24-Hour on/off timer
- 4-Way auto swing
- Auto changeover
- Auto restart
- Jet cool/Jet heat
- Built-in low ambient standard, down to 14°F (cooling mode)
- Condensate Sensor Connection
- Inverter (variable speed compressor)
- IDU compatible with Multi F ODUs
- Smart Diagnosis
- 3M Micro Filter
- Self-cleaning indoor coil
- Sleep mode
- Cooling only function
- Built-in Wi-Fi via Smart ThinQ™ app
- Built-in drain pan heater (9/12k)

Optional Accessories:

- ☐ MultiSITE™ CRC2 - PREMTBVC2
- ☐ Programmable Remote Controller - PREMTB100
- ☐ Deluxe Remote Controller - PREMTB200
- ☐ Dry Contact 3rd Party Thermostat - PDRYCB320
- ☐ AC Smart 5 - PACSSA000
- ☐ Low Ambient Kit -40°F cooling PQCA0, PAG-HS0/PAG-HS3 Wind Guards
- ☐ Without PQCA0 Cooling to 0°F

For a complete list of available accessories, contact your LG representative.

For continual product development, LG reserves the right to change specifications without notice.

© LG Electronics Canada, Inc., North York, ON. All rights reserved. "LG Life's Good" is a registered trademark of LG Corp. /www.lgdfs.ca

**Operating Range:****Outdoor Unit:**

Cooling (°F DB)	14 ~ 118
Heating (°F WB)	-4 ~ +65

Indoor Unit:

Cooling (°F WB)	53 ~ 75
Heating (°F DB)	60 ~ 86

Electrical:

Power Supply (V/Hz/Ø)	208-230/60/1
-----------------------	--------------

System Data:

Refrigerant Type	R410A
Refrigerant Control	EEV
Refrigerant Charge (lbs.)	2.21
ODU Sound Pressure (Cooling / Heating) (±3 dB[A]) ³	45 / 48
IDU Sound Pressure Cooling (H/M/L/Sleep) (±3 dB[A]) ³	41 / 35 / 25 / 21
Heating (H/M/L) (±3 dB[A]) ³	41 / 35 / 25 / 21
ODU Net / Shipping Weight (lbs.)	74.1 / 78.9
IDU Net / Shipping Weight (lbs.)	20.5 / 25.6
Heat Exchanger Coating	GoldFin™

Fan:

ODU Type	Propeller
IDU Type	Cross Flow
Fan Speeds (Fan/Cool/Heat)	6 / 6 / 6
Quantity (ODU + IDU)	1 + 1
Motor/Drive	Brushless Digitally Controlled/Direct
ODU Max. Air Flow Rate (CFM)	1,165
IDU Air Flow Cooling, Max/H/M/L (CFM)	459 / 338 / 317 / 194
Heating, Max/H/M/L (CFM)	459 / 338 / 317 / 229
Dehumidification (pts./hr.)	2.7

Notes:

1. Acceptable operating voltage: 187V-253V.
2. Piping lengths are equivalent.
3. Sound Pressure levels are tested in an anechoic chamber under ISO Standard 3745.
4. All communication / connection (power) cable from the outdoor unit to the indoor unit is field supplied and is to be minimum four-conductor, 18 AWG, stranded, shielded or unshielded (if shielded, it must be grounded to the chassis of the outdoor unit only), and must comply with applicable local and national codes.
5. See Engineering Manual for sensible and latent capacities.
6. Power wiring cable size must comply with the applicable local and national code.
7. The indoor unit comes with a dry helium charge.
8. This data is rated 10 ft. above sea level, with 24.6 ft. of refrigerant line and a 0 ft. level difference between outdoor and indoor units.
9. Must follow installation instructions in the applicable LG installation manual.
10. BACnet® is a registered trademark of ASHRAE. LonWorks® is a trademark of Echelon Corporation.



Job Name/Location: _____

LA120HSV5

Single Zone Art Cool™ Mirror Wall Mount


Outdoor Unit (ODU) - LSU120HSV5, Indoor Unit (IDU) - LAN120HSV5



Tag No.: _____

Date: _____

PO No.: _____

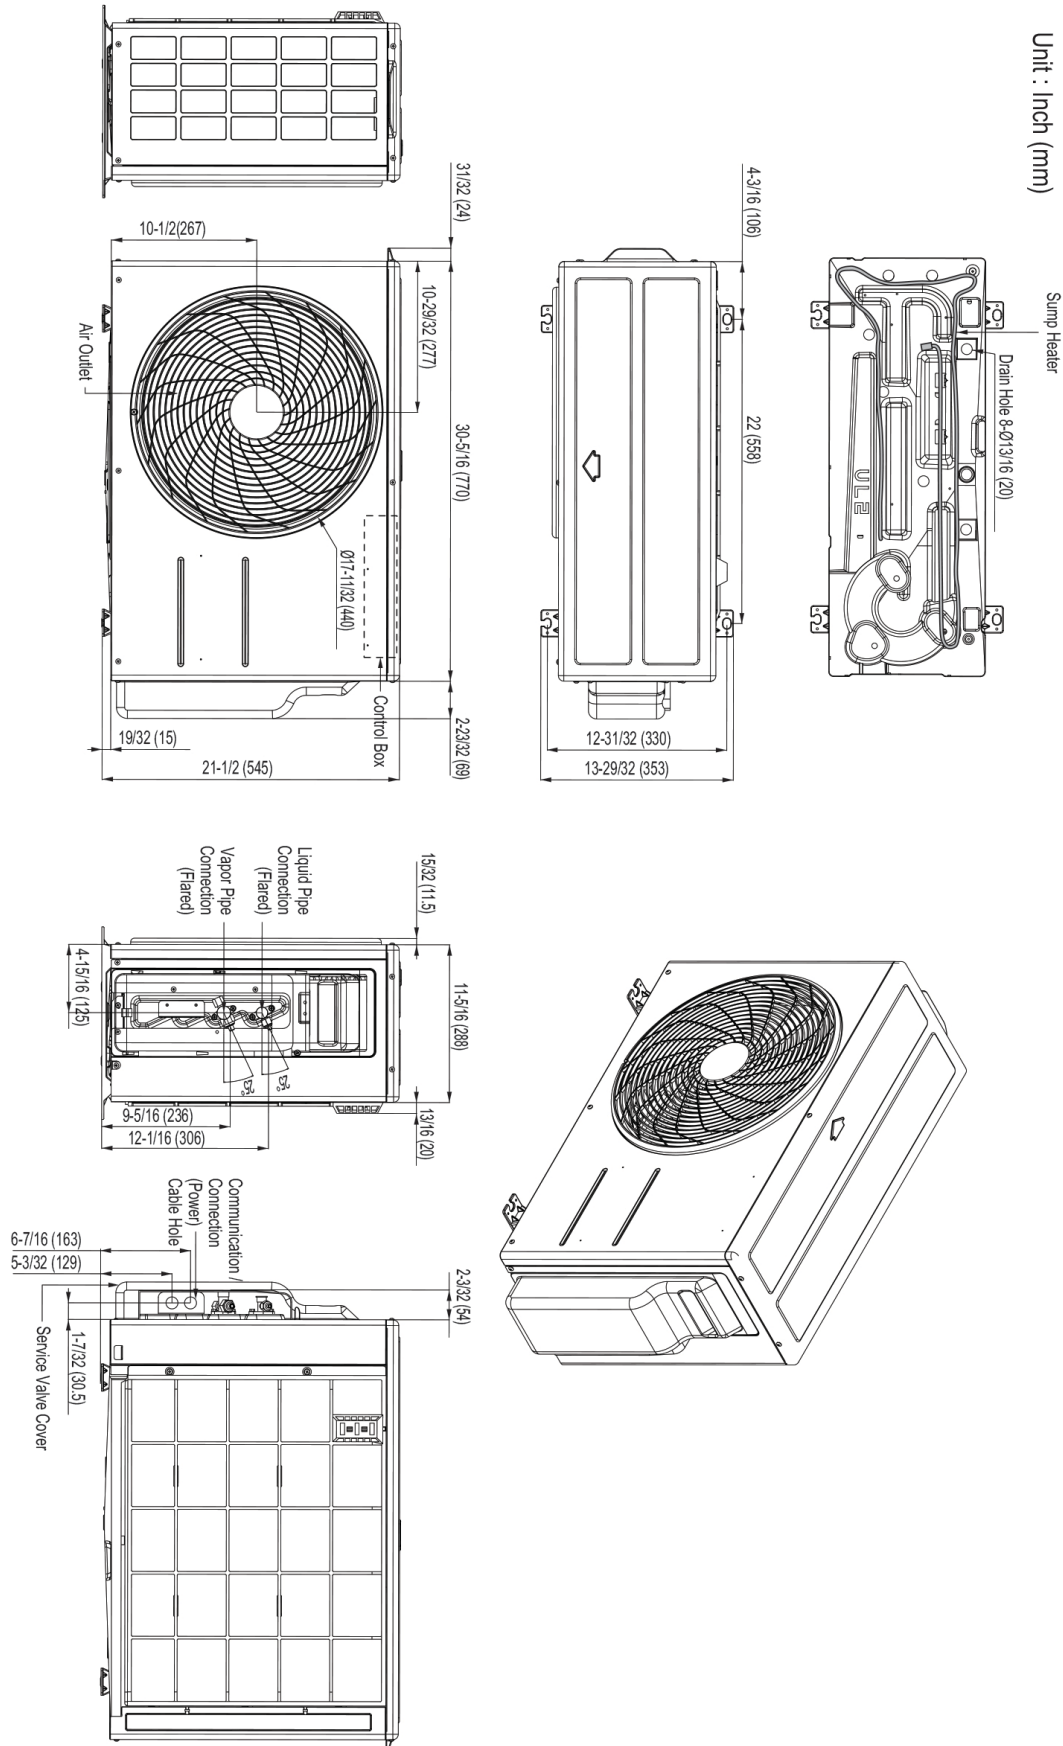

LA120HSV5

Single Zone Art Cool™ Mirror Wall Mount

Outdoor Unit (ODU) - LSU120HSV5, Indoor Unit (IDU) - LAN120HSV5



PO No.: _____

Unit : inch (mm)

Top View Dimensions:

- Width: 32-15/16 (837)
- Depth: 12-1/8 (308)
- Air Intake Hole: 30-3/16 (767)
- Air Outlet Hole: 2-7/32 (56)

Side View Dimensions:

- Height: 32-15/16 (837)
- Air Intake Hole: 30-3/16 (767)
- Air Outlet Hole: 2-7/32 (56)

Front View Dimensions:

- Width: 32-15/16 (837)
- Depth: 12-1/8 (308)
- Air Intake Hole: 30-3/16 (767)
- Air Outlet Hole: 2-7/32 (56)

Terminal Block for Power Supply and Communication:

- Approx. 11-11/32 (288) to gas pipe
- Approx. 8-19/32 (218) to liquid pipe

Drain Hose Connection:

- 1-27/32 (47)
- 1-1/2 (38)
- Unit Outline
- Connecting Gas/Liquid Pipe
- 5-9/16 (132)

In Case of Left Side Piping:

- 12-1/8 (308)