

Job Name/Location:

Tag #:

Date:

For: File Resubmit

PO No.:

Approval Other

Architect:

GC:

Engr:

Mech:

Rep:

(Company)

(Project Manager)

LV361HHV4

Single Zone LGRED° Vertical Air Handler Unit

Outdoor Unit (ODU) - LUU360HHV Indoor Unit (IDU) - LVN361HV4

Performance:

Cooling:

| | |
|---|--------------------------|
| Cooling Capacity (Min~Rated~Max, Btu/h) | 14,400 ~ 33,000 ~ 44,000 |
| SEER2 / EER2 | 16.40 / 11.95 |

SEER - Seasonal Energy Efficiency Ratio

EER - Energy Efficiency Ratio

Heating:

| | |
|---|--------------------------|
| Heating Capacity (Min~Rated~Max, Btu/h) | 16,000 ~ 37,500 ~ 43,000 |
| HSPF2 | 9.30 |
| Max heating @ Indoor 70° DB (Btu/h) | |
| Outdoor 17°F WB | 39,000 |
| Outdoor 5°F WB* | 33,800 |
| Outdoor -4°F WB | 33,810 |
| Outdoor -13°F WB | 28,140 |

HSPF - Heating Seasonal Performance Factor

* The Capacities at 5°F does not refer to H42 testing conditions.

Cooling Nominal Test Conditions:

Indoor: 80°F DB / 67°F WB

Outdoor: 95°F DB / 75°F WB

Heating Nominal Test Conditions:

Indoor: 70°F DB / 60°F WB

Outdoor: 47°F DB / 43°F WB

Electrical:

| | |
|---|--------------------|
| Power Supply ¹ (V/Hz/Ø) | 208-230 / 60 / 1 |
| MOP / MCA (A) | 40 / 32 |
| Cooling / Heating Rated Amps (A) | 11.7 / 14.9 |
| Compressor(A) | 22.0 |
| Fan Motor (IDU + ODU) (A) | 1.0 + (1.6 x 2) |
| Cooling Power Input (Min~Rated~Max, kW) | 0.81 ~ 2.76 ~ 4.78 |
| Heating Power Input (Min~Rated~Max, kW) | 0.96 ~ 3.40 ~ 4.1 |
| Locked Rotor Amps (A) | 33 |

MOP - Maximum Overcurrent Protection

MCA - Minimum Circuit Ampacity

Piping:

| | |
|--------------------------------------|------------|
| Installed Liquid Pipe (in., O.D.) | 3/8 Flare |
| Installed Vapor Pipe (in., O.D.) | 5/8 Flare |
| IDU Liquid Connection (in., O.D.) | 3/8 Flare |
| IDU Vapor Connection (in., O.D.) | 5/8 Flare |
| Additional Refrigerant (oz./ft.) | 0.43 |
| Min/Max. Pipe Length (ft.) | 16.4 / 246 |
| Piping Length (no add'l refig., ft.) | 24.9 |
| Max. Elevation (ft.) | 98.4 |

Features:

- Hot start
- Inverter (variable speed)
- Auto restart
- Control lock
- W2 terminal connection
- Group control
- Timer (on/off)
- Sleep Mode
- Optional Wi-Fi Control
- Built in dry contact

- ODU Drain Pan Heater
- Night Quiet Function
- IDU compatible with Multi F (18k, 24k, 36k models)

Required Accessories (sold separately):

Controller (Any LG wired remote controller)

Optional Accessories:

- ☐ MultiSITE™ CRC2 - PREMTBVC2
- ☐ Programmable Remote Controller - PREMTB100
- ☐ Delux Remote Controller - PREMTB200
- ☐ Dry Contact 3rd Party Thermostat - PDRYCB320
- ☐ Electric Heater¹³
- ☐ Remote Temperature Sensor - ZRTBS01
- ☐ Downflow Conversion Kit - PNDFJ0
- ☐ Aux Heater relay kit - PRARH1
- ☐ AC Smart 5 - PACS5A000
- ☐ Low Ambient Kit -40°F cooling PQCA0, PAG-HS6/PAG-HS7 Wind Guards
- ☐ Without PQCA0 Cooling to 0°F
- ☐ Wi-Fi Module - PWFMD200

For a complete list of available accessories, contact your LG representative.

For continual product development, LG reserves the right to change specifications without notice.

© LG Electronics Canada, Inc., North York, ON. All rights reserved. "LG Life's Good" is a registered trademark of LG Corp. /www.lgdfs.ca



Operating Range:

Outdoor Unit:

| | |
|-----------------|-----------|
| Cooling (°F DB) | 5 to 118 |
| Heating (°F WB) | -13 to 64 |

Indoor Unit:

| | |
|-----------------|----------|
| Cooling (°F WB) | 57 to 77 |
| Heating (°F DB) | 59 to 81 |

System Data:

| | |
|--|---------------|
| Refrigerant Type/Control | R410A / EEV |
| Refrigerant Charge (lbs.) | 7.50 |
| ODU Sound Pressure Max (Cool / Heat) ±1 dB(A) ³ | 52 / 54 |
| IDU Sound Pressure (H/M/L) ±1 dB(A) ³ | 44 / 41 / 39 |
| ODU Net / Shipping Weight (lbs.) | 198.9 / 223.1 |
| IDU Net / Shipping Weight (lbs.) | 122.4 / 134.0 |

Fan:

| | |
|--|--|
| ODU / IDU Fan Type | Propeller / Sirocco |
| Fan Speeds (Fan/Cool/Heat) | 3 / 3 / 3 |
| Fan Quantity (ODU + IDU) | 2 + 1 |
| Motor/Drive | Electronically Commutated Motor (ECM) / Direct |
| Maximum ODU Air Volume (CFM) | 4,238 |
| IDU Air Volume (H/M/L) (CFM) | 988 / 883 / 798 |
| Dehumidification Rate (pts/hr) ¹⁰ | 7.4 |
| IDU External Static Pressure Operating Range (Min~Default~Max) (in-wg) ¹¹ | 0.1 ~ - -0.7 |

Notes:

1. Acceptable operating voltage: 187V-253V.
2. Piping lengths are equivalent.
3. Sound Pressure levels are tested in an anechoic chamber under ISO Standard 3745.
4. All power/communication cable to be minimum 14 American wire gage (AWG), 4-conductor, stranded, shielded or unshielded wire and must comply with applicable local and national code. If shielded, the wire must be grounded to the chassis at the outdoor unit only.
5. Power wiring cable size must comply with the applicable local and national code.
6. The indoor unit comes with a dry helium charge.
7. This data is rated 0 ft. above sea level, with 25 ft. of refrigerant line and a 0 ft. level difference between outdoor and indoor units.
8. Must follow installation instructions in the applicable LG installation manual.
9. Dehumidification rate is based on high speed airflow.
10. 18k, 24k, and 36k IDU units have ECM fan that automatically adjusts throughout the ESP (External Static Pressure) range. Therefore, there is no default ESP value for these units.
11. 18k and 24k VAHUs are supplied with socket adapters for pipe transitions.
12. Controller not included.
13. Electric heater accessory available in 3kW, 5kW, 8kW, and 10kW capacities.

Refer to the engineering manual for details.

LGRED°
Powerful Heat Technology

Inverter

CS
C US


AHRI CERTIFIED
www.ahridirectory.org
Utility Small HP
AHRI Standard 210/240
Certification applies only when the complete system is listed with AHRI

SB_SZ_LGRED_VAHU_LV361HHV4_2023_01

LVN361HV4
Single Zone LGRED° Vertical Air Handler Unit



Tag No.: _____
Date: _____
PO No.: _____

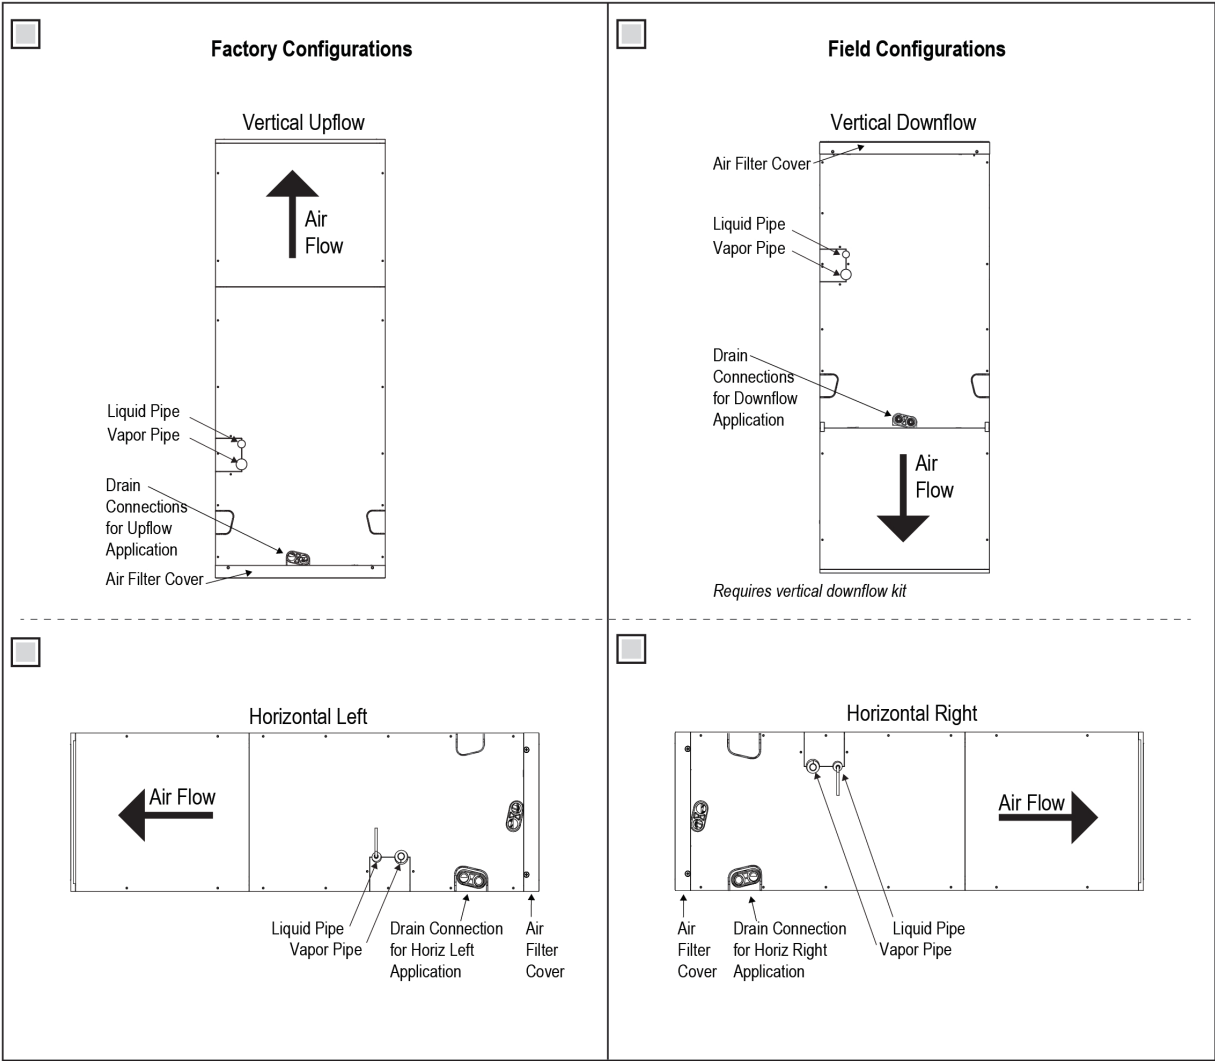

Job Name/Location: _____








LUU360HHV
Single Zone LGRED° Vertical Air Handler Unit



Tag No.: _____

Date: _____

PO No.: _____

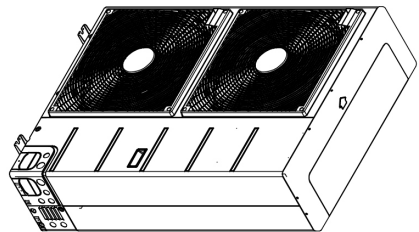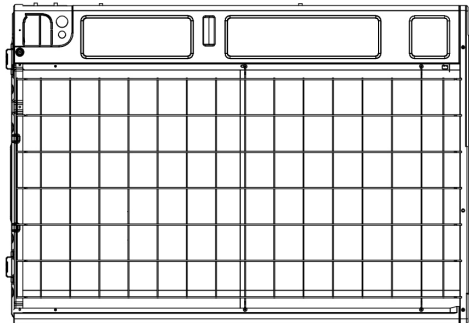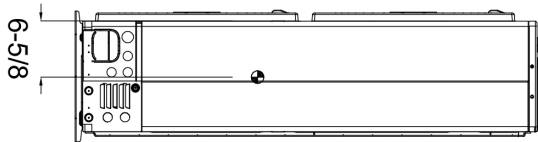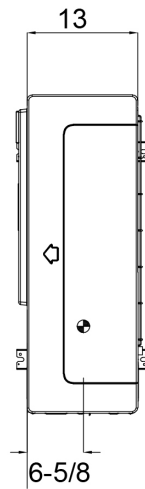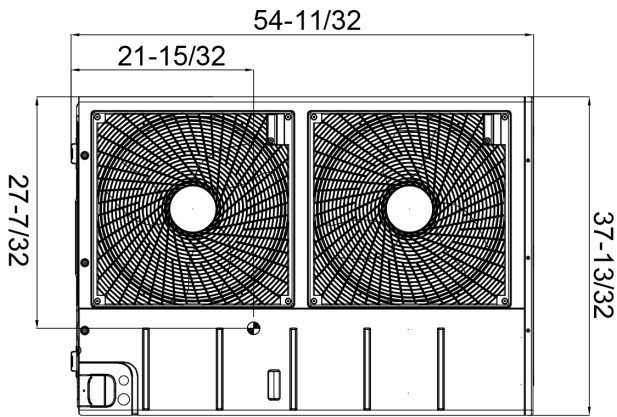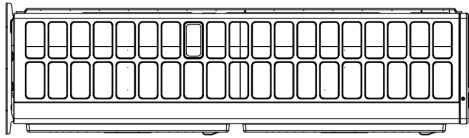


Unit: inch


LVN361HV4
Single Zone LGRED° Vertical Air Handler Unit




Tag No.: _____
Date: _____
PO No.: _____

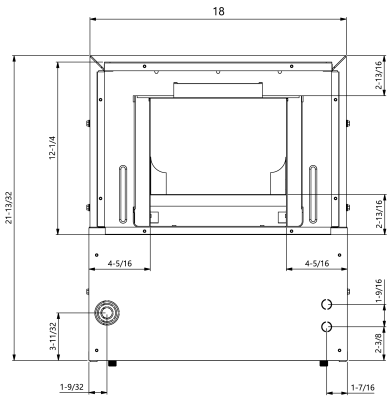


Top View

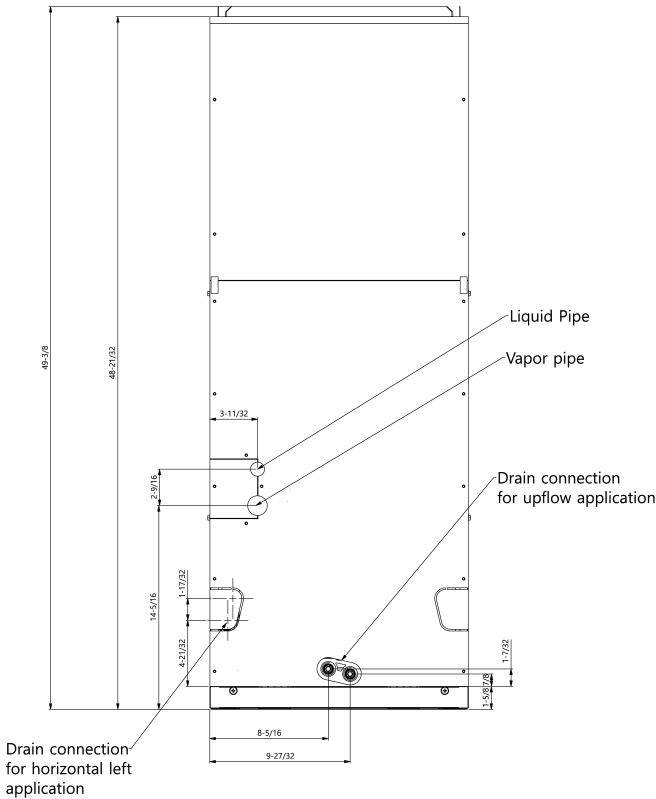

Front View

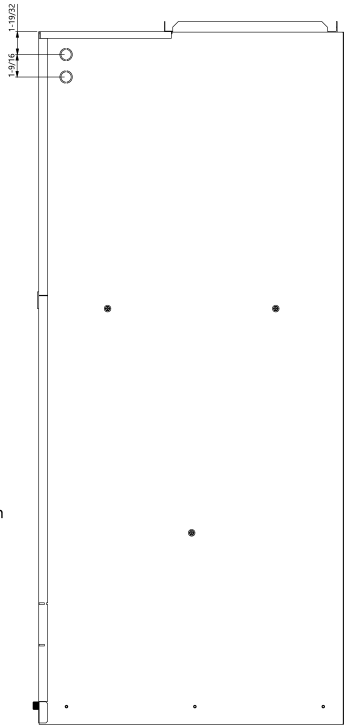

Side View

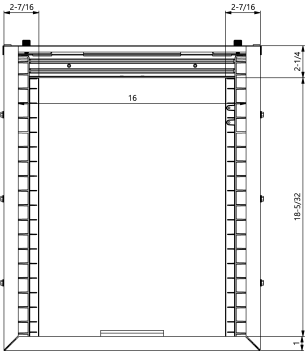

Bottom View